

# 'TRADER' SERVICE SHEETS

## ACE MODEL S6 5-VALVE (Plus Rectifier) A.C. SET

**A** SPECIAL muting valve is used in the Ace Radio S6 5-valve (plus rectifier) superhet for A.C. mains of 200-250 V. The set has alternative aerial sockets, and provision is made for both a gramophone pick-up and an extension speaker.

### CIRCUIT DESCRIPTION

Two alternative aerial connections (A1 via fixed series condenser C1) to inductively coupled band-pass input filter. Primary L1, L2 tuned by C20; secondary L5, L6 tuned by C22; coupling coils L3, L4.

First valve (V1, Tungram metallised V04) is an octode operating as frequency changer with electron coupling. Oscillator grid coils L7, L8 tuned by C24; anode reaction coils L9, L10; tracking by means of shaped condenser vanes and C26, C32 (L.W.).

Second valve, a variable-mu H.F. pentode (V2, Tungram metallised HP4106) operates as intermediate frequency amplifier with tuned-primary tuned-secondary transformer couplings L11, L12 and L13, L14. Moving-iron meter visual tuning indicator T.I. in anode H.T. feed circuit.

Intermediate frequency 125 KC/S.

Diode second detector forms part of double diode triode valve (V4, Tungram metallised DDT4). Second diode, fed from V2 anode via condenser C14 provides direct current potential which is developed across load resistance R15 and fed back through decoupling circuits as G.B. to F.C. and L.F. valves. Delay voltage is obtained from V4 cathode resistance R11.

Audio-frequency component in output from signal diode is developed across manual volume control R7, and passed via coupling condenser C11 to grid of V4 triode section which operates as L.F. amplifier. Provision for connection of gramophone pick-up by switch S7. On gram., S8 breaks H.T. line to V1 and V2 anodes and thus prevents radio break-through.

V3 is a triode (Tungram metallised HL4) operating as muting valve to give inter-station noise suppression. When a station is tuned in the D.C. potential developed across R6 and R7 by reason of the carrier wave is applied through R8 as negative G.B. to V3, with the result that the anode current of the valve is reduced to a negligible value. Immediately the receiver is off tune, the bias is removed from V3 grid and the anode current increases. The V4 G.B.


resistance R11 is common also to V3 cathode, so that any increase of anode current in V3 will increase the voltage drop along R11 and thus the G.B. applied to V4 triode grid. Resistance values are so chosen that the bias applied when the receiver is off tune is excessive, with the result that the L.F. valve is paralysed and gives no amplification. Thus, between stations, the L.F. end of the receiver is "dead." Control of the muting valve is exercised by means of a variable potentiometer R9, which supplies the anode current.

Resistance-capacity coupling by R14, C15 and R16 to output pentode (V5, Tungram APP4120). Tone correction by fixed condenser C16 in anode circuit. Provision for connection of high impedance external speaker across primary of internal speaker transformer T1.

H.T. current is supplied by I.H.C. full-wave rectifying valve (V6, Tungram APV4200). Smoothing by speaker field coil L17 and dry electrolytic condensers C18, C19.


### DISMANTLING THE SET

**Removing Chassis.**—If it is desired to remove the chassis from the cabinet, remove the back (four screws), the four control knobs (recessed grub screws), the four chassis fixing bolts (with washers), the two small countersunk-head wood screws holding the tuning dial to the cabinet front and the tuning indicator from the front of the cabinet (two screws). By lifting the chassis up slightly, it can now be removed from the cabinet to the

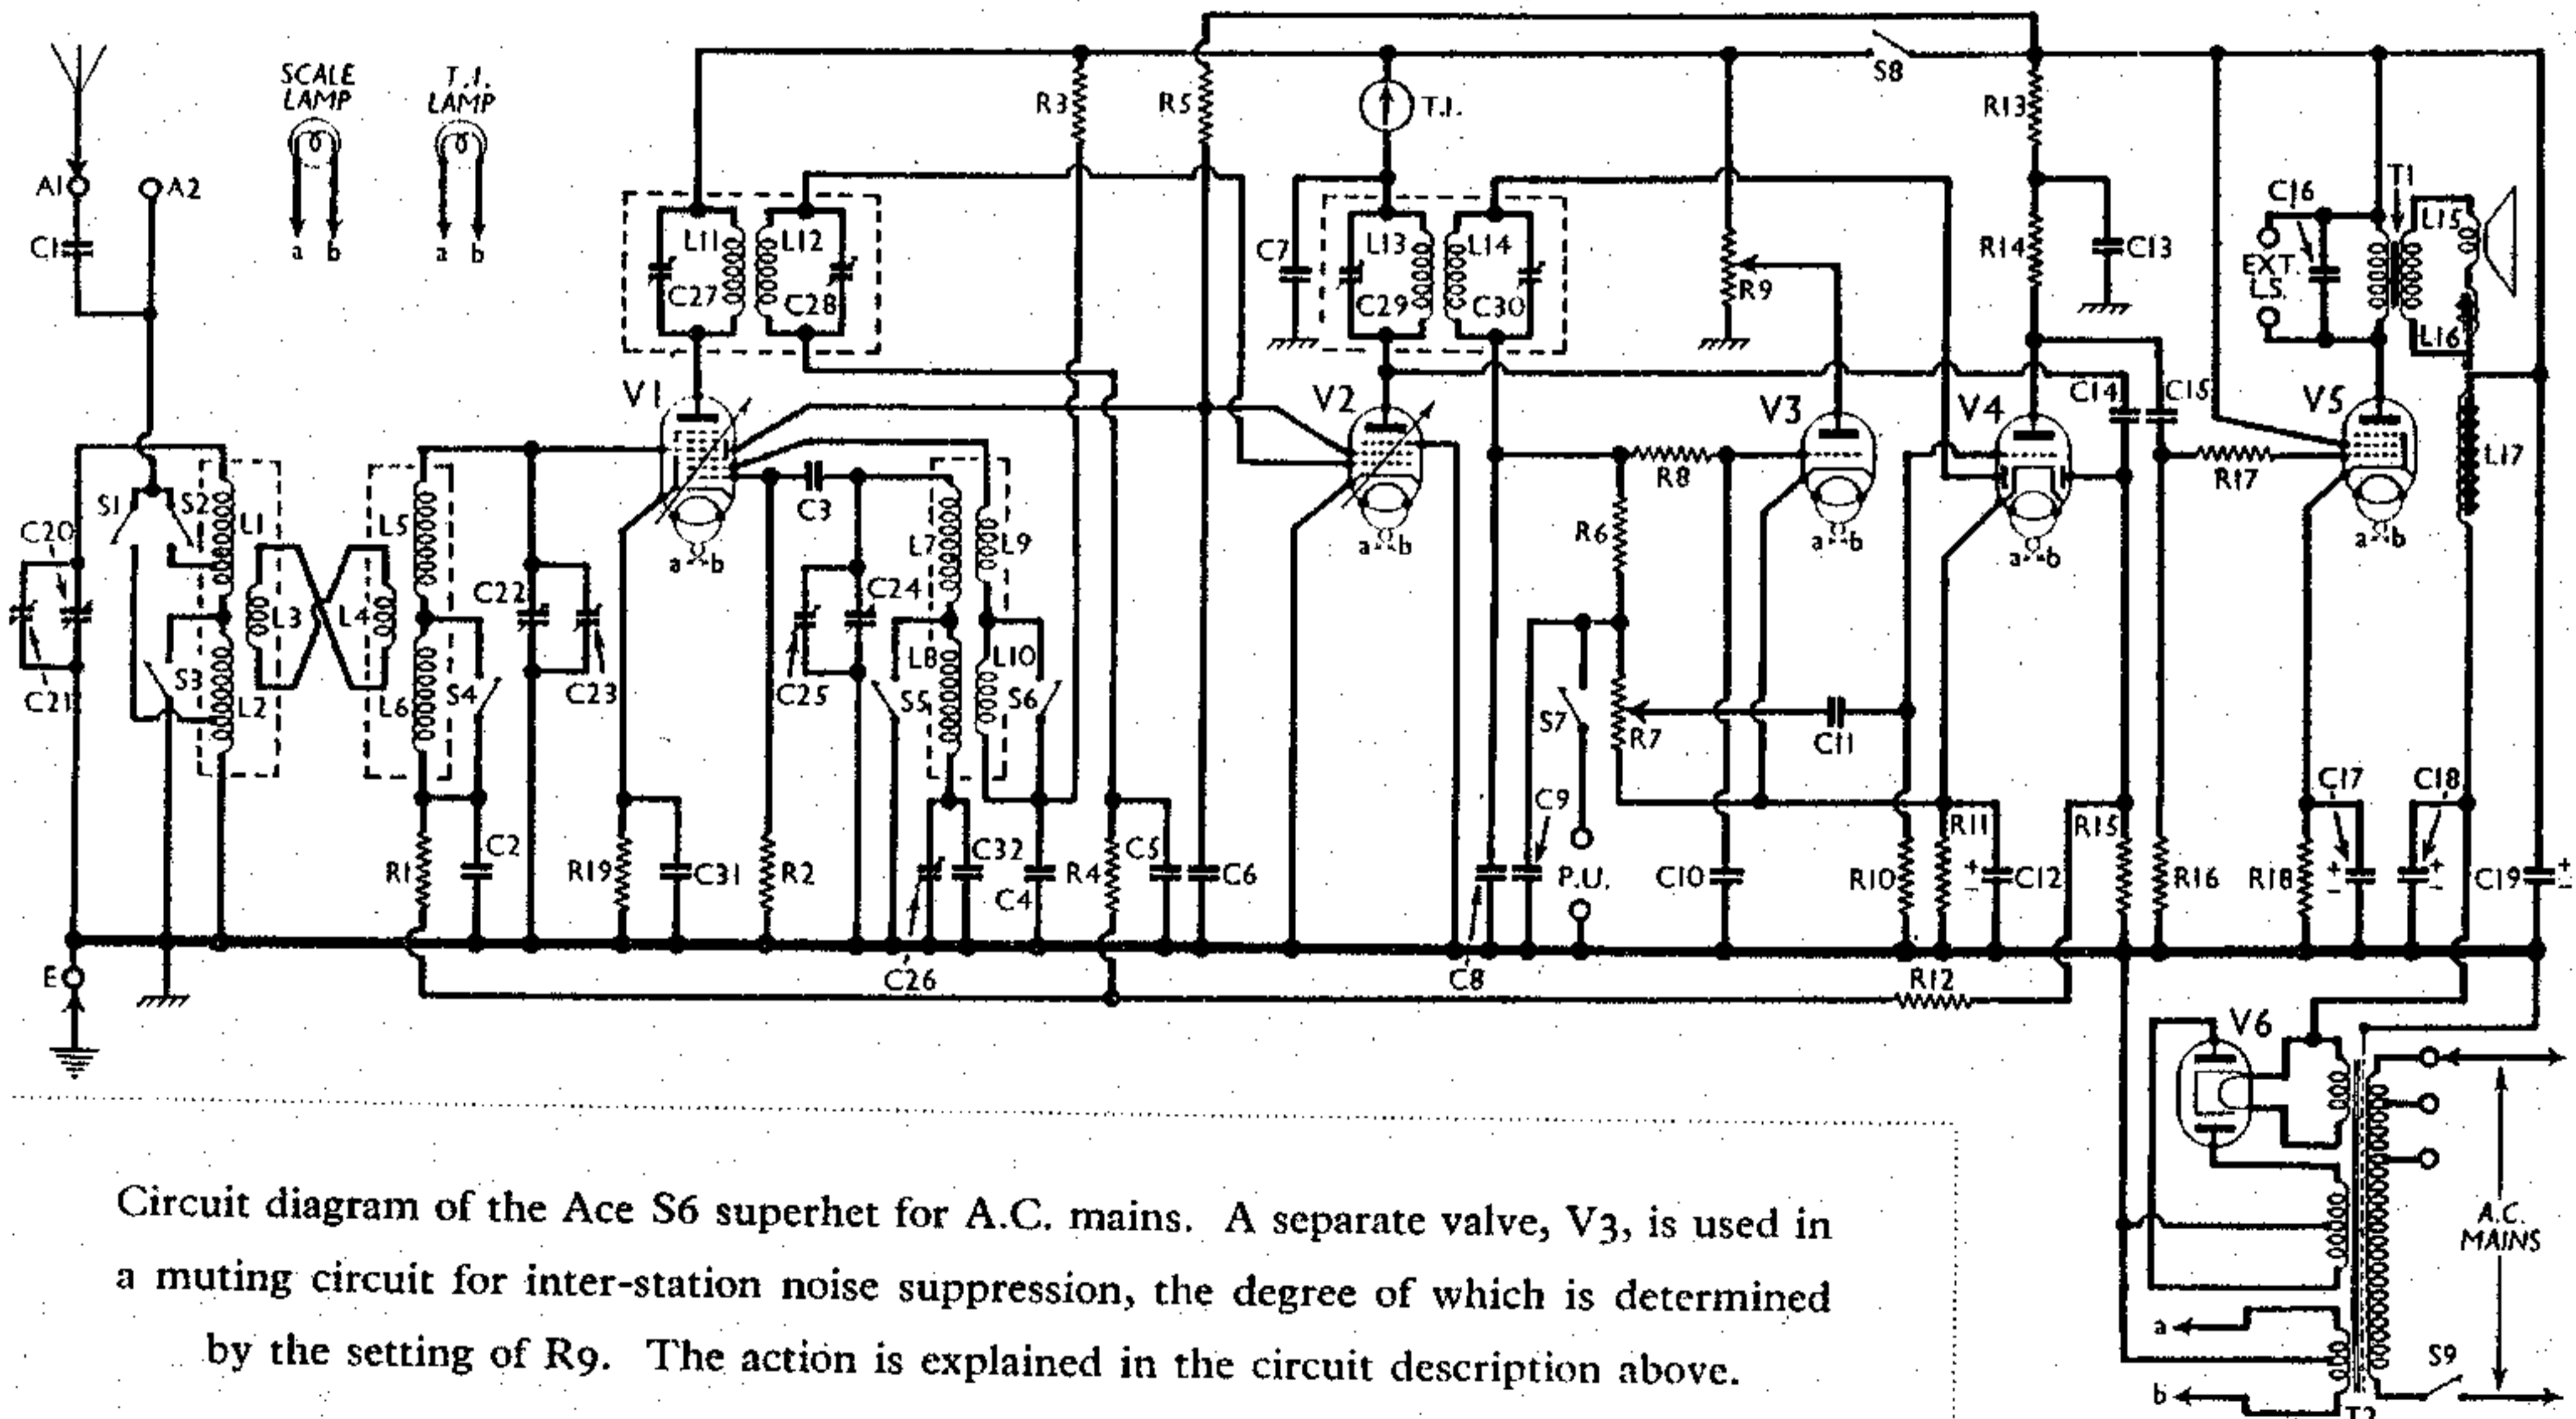

Circuit diagram of the Ace S6 superhet for A.C. mains. A separate valve, V3, is used in a muting circuit for inter-station noise suppression, the degree of which is determined by the setting of R9. The action is explained in the circuit description above.

Under - chassis view. The switch unit between S4 and S7 is blank. C26 (adjustable through a hole in the chassis deck) is in parallel with the fixed condenser C32. C27 C28, C29 and C30 are the I.F. transformer trimmers.

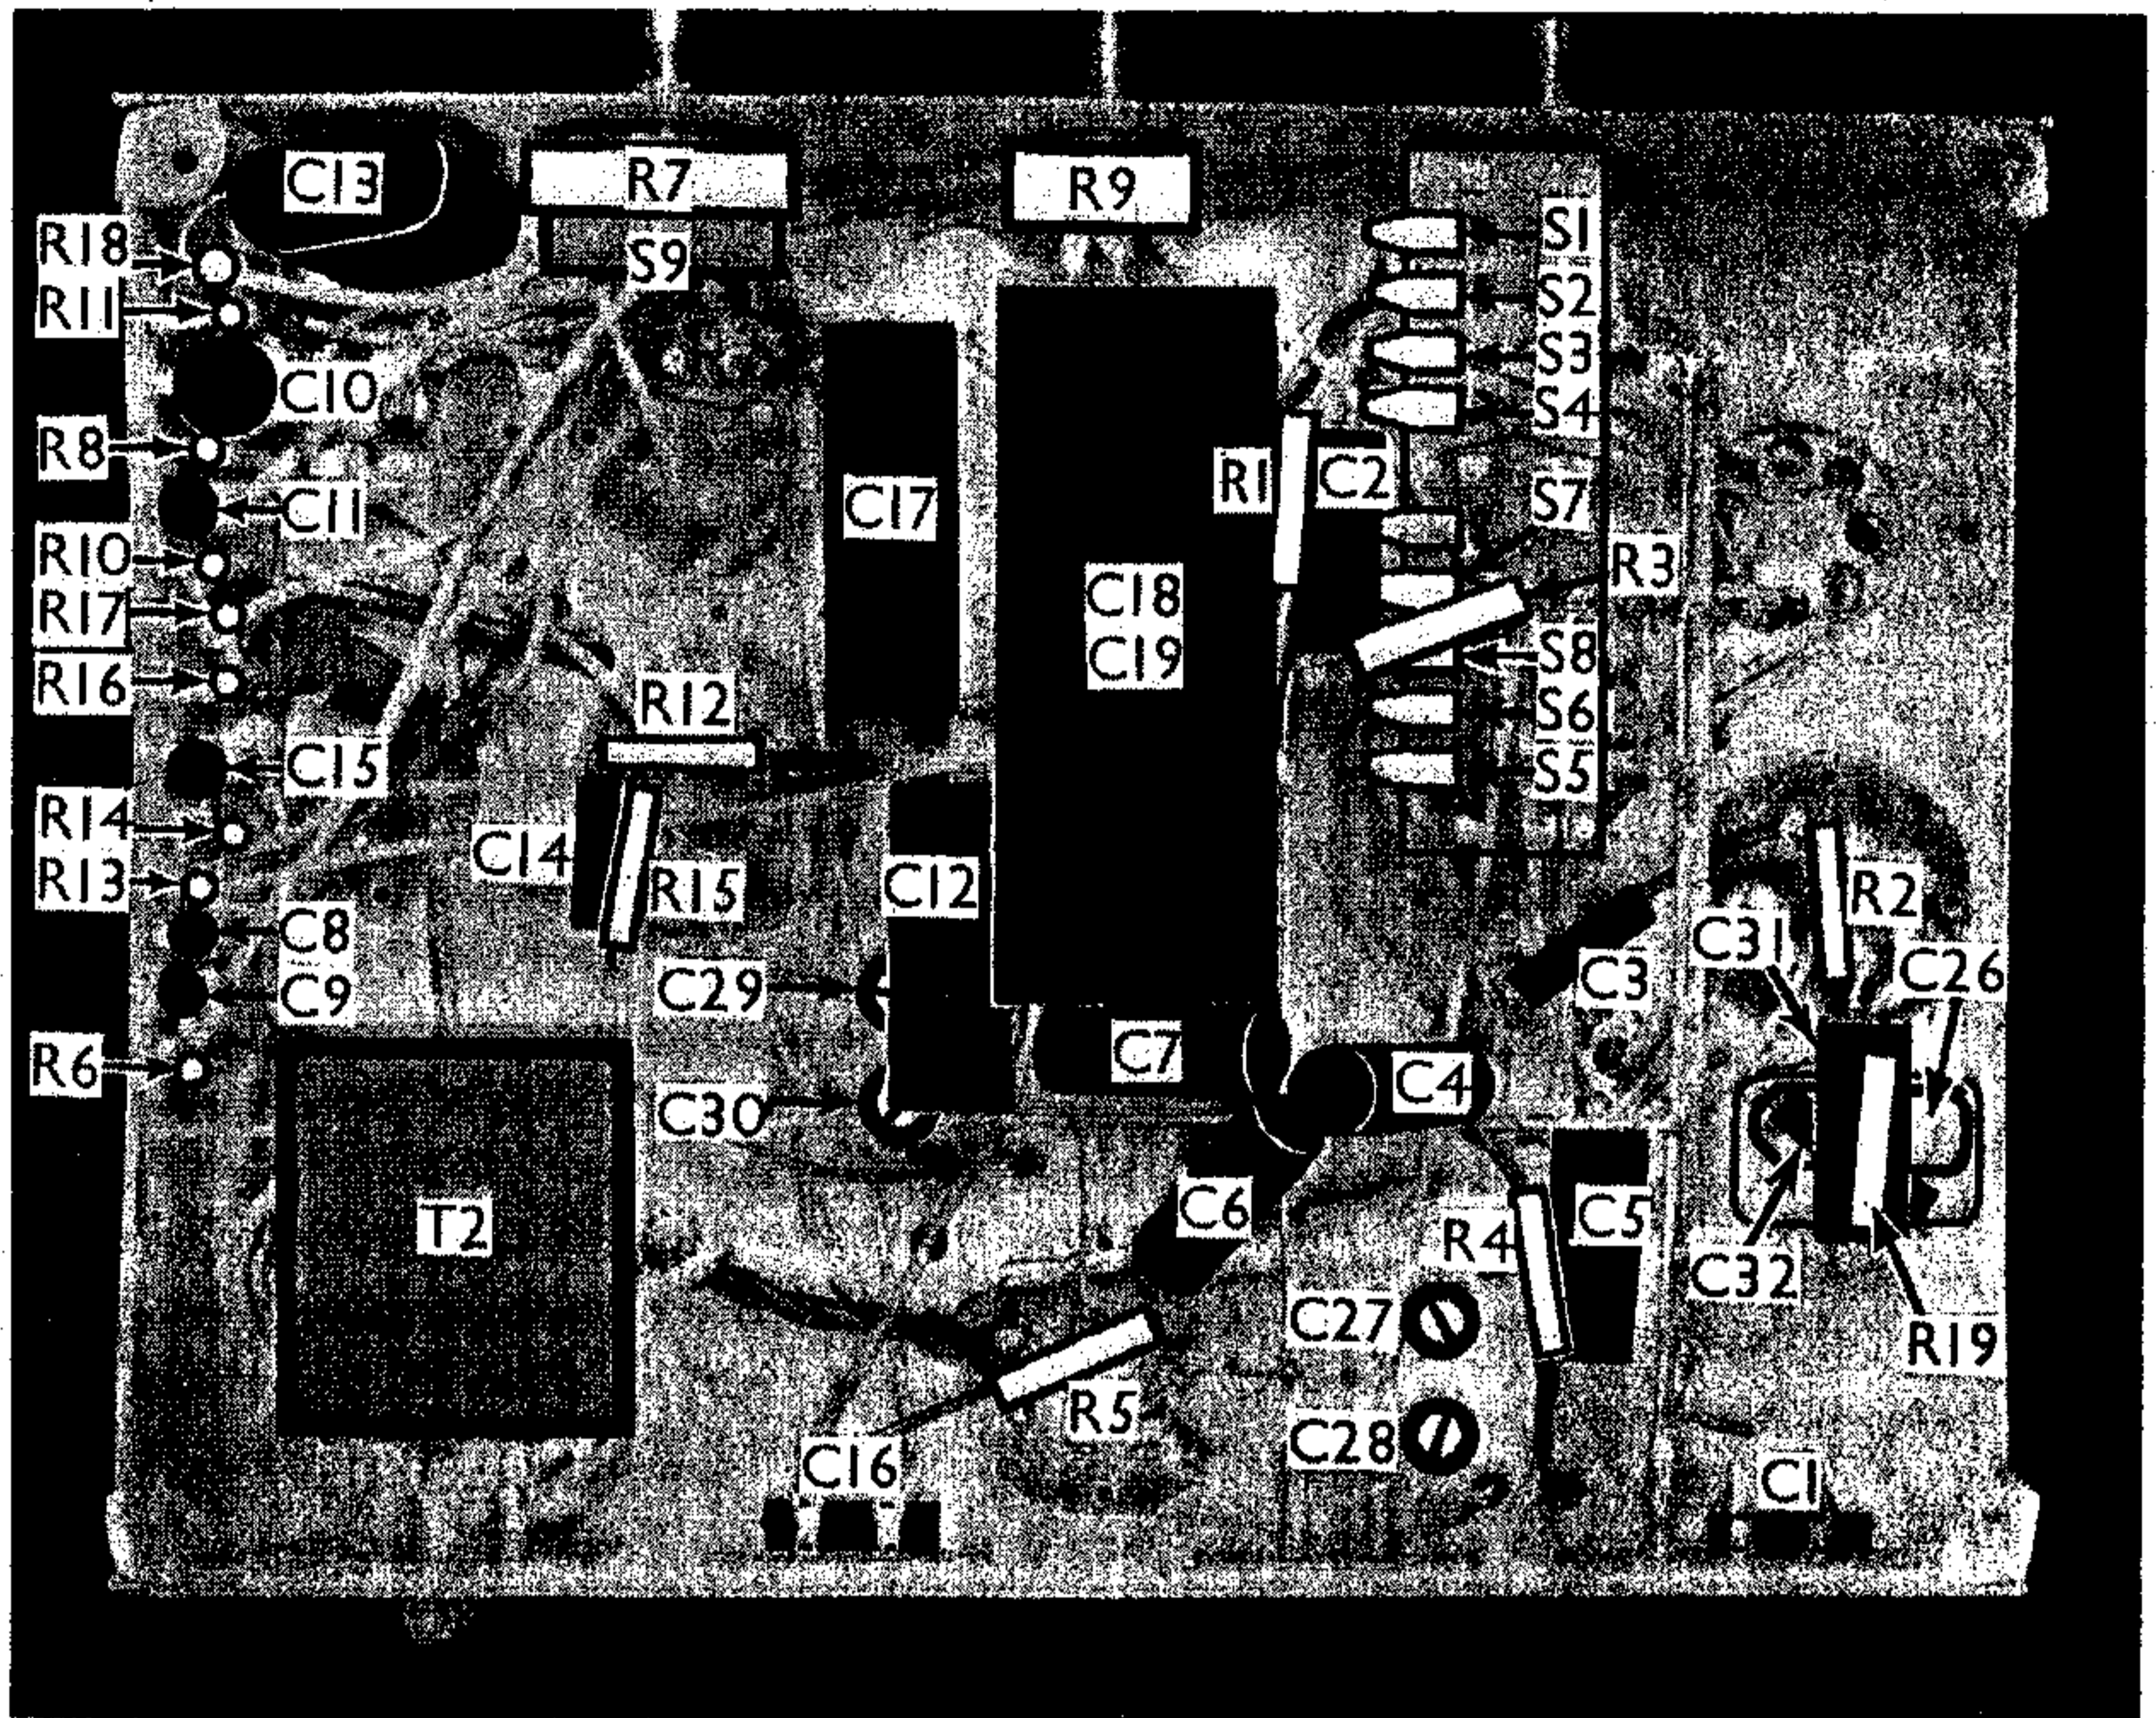

extent of the speaker leads. These are not very long, but should be enough to allow of normal repairs being carried out.

To free the chassis entirely, unsolder the leads from the speaker. When replacing, connect as follow, numbering the tags from bottom to top:—1, red; 2, yellow; 3 and 4 joined together, black.

**Removing Speaker.**—To remove the speaker from the cabinet, remove the four round-head wood screws holding it to the sub-baffle. When replacing, see that the transformer is pointing to the bottom right-hand corner of the cabinet.

**COMPONENTS AND VALUES**

| Resistances | Values (ohms)                                 |
|-------------|---|
| R1          | V1 pent. cont. grid decoupling .. 1,000,000   |
| R2          | V1 osc. grid resistance .. 50,000             |
| R3          | V1 osc. anode decoupling .. 25,000            |
| R4          | V2 cont. grid decoupling .. 1,000,000         |
| R5          | V1 and V2 S.G.'s H.T. feed .. 25,000          |
| R6          | I.F. stopper .. 100,000                       |
| R7          | V4 signal diode load; vol. control .. 250,000 |
| R8          | V3 grid resistance .. 1,000,000               |
| R9          | V3 anode resistance; muting control .. 50,000 |
| R10         | V4 triode grid resistance .. 250,000          |
| R11         | V4 cathode resistance .. 10,000               |
| R12         | A.V.C. line decoupling .. 1,000,000           |
| R13         | V4 anode decoupling .. 100,000                |
| R14         | V4 anode load .. 50,000                       |
| R15         | V4 A.V.C. diode load .. 500,000               |
| R16         | V5 grid resistance .. 250,000                 |
| R17         | V5 grid I.F. stopper .. 50,000                |
| R18         | V5 G.B. resistance .. 400                     |
| R19*        | V1 fixed G.B. resistance .. 300               |

\* May not appear in some chassis.

| Condensers | Values (μF)                              |
|------------|--|
| C1         | Aerial series condensers .. 0.0003       |
| C2         | V1 pent. cont. grid decoupling .. 0.1    |
| C3         | V1 osc. grid condenser .. 0.0001         |
| C4         | V1 osc. anode decoupling .. 0.1          |
| C5         | V2 cont. grid decoupling .. 0.1          |
| C6         | V1 and V2 S.G.'s by-pass .. 0.1          |
| C7         | V2 anode decoupling .. 0.1               |
| C8         | I.F. by-passes .. 0.0003                 |
| C9         |  |
| C10        | V3 grid by-pass .. 0.1                   |
| C11        | L.F. coupling to V4 triode .. 0.01       |
| C12*       | V4 cathode by-pass .. 8.0                |
| C13        | V4 triode anode decoupling .. 1.0        |
| C14        | Coupling to V4 A.V.C. diode .. 0.0001    |
| C15        | L.F. coupling to V5 .. 0.01              |
| C16        | Tone corrector .. 0.01                   |
| C17*       | V5 cathode by-pass .. 25.0               |
| C18*       | H.T. smoothing .. 8.0                    |
| C19*       |  |
| C20†       | Band-pass primary tuning .. —            |
| C21†       | Band-pass primary trimmer .. —           |
| C22†       | Band-pass secondary tuning .. —          |
| C23†       | Band-pass secondary trimmer .. —         |
| C24†       | Oscillator tuning .. —                   |
| C25†       | Oscillator main trimmer .. —             |
| C26†       | Oscillator L.W. tracker .. —             |
| C27†       | 1st I.F. trans. pri. tuning .. —         |
| C28†       | 1st I.F. trans. sec. tuning .. —         |
| C29†       | 2nd I.F. trans. pri. tuning .. —         |
| C30†       | 2nd I.F. trans. sec. tuning .. —         |
| C31§       | V1 cathode by-pass .. 0.1                |
| C32        | Oscillator L.W. tracker, fixed .. 0.0003 |

\* Electrolytic † Variable ‡ Pre-set § May not appear in some chassis.

| Other Components | Approx. Values (ohms)           |      |
|------------------|---------------------------------|------|
| L1               | Band-pass primary coils .. 8.0  |      |
| L2               |                                 | 27.0 |
| L3               |                                 | 0.2  |
| L4               | Band-pass coupling coils .. 0.2 |      |
| L5               |                                 | 8.0  |
| L6               |                                 | 27.0 |

| Other Components (contd.) | Approx. Values (ohms)                  |              |
|---------------------------|--|--------------|
| L7                        | Oscillator tuning coils .. 7.0         |              |
| L8                        |  | 15.5         |
| L9                        |  | 8.0          |
| L10                       | Oscillator reaction coils .. 4.5       |              |
| L11                       |  | 85.0         |
| L12                       | 1st I.F. trans. { Pri. .. 85.0         |              |
| L13                       |  | Sec. .. 85.0 |
| L14                       | 2nd I.F. trans. { Pri. .. 85.0         |              |
| L15                       |  | Sec. .. 85.0 |
| L16                       | Speaker speech coil .. 2.3             |              |
| L17                       | Hum neutralising coil .. 0.1           |              |
| T1                        | Speaker input trans. { Pri. .. 2,500.0 |              |
|                           | { Sec. .. 220.0                        |              |
| T2                        | Mains trans. { Pri. total .. 27.5      |              |
|                           | { Heat. sec. .. 0.1                    |              |
|                           | { Rect. heat. sec .. 0.1               |              |
|                           | { H.T. sec. tot. .. 550.0              |              |
| S1-S6                     | Waveband switches .. —                 |              |
| S7                        | Gram. pick-up switch .. —              |              |
| S8                        | Radio muting switch (gram.) .. —       |              |
| S9                        | Mains switch, ganged R7 .. —           |              |
| T.I.                      | Tuning indicator .. 4,700.0            |              |

**VALVE ANALYSIS**

Valve voltages and currents given in the table below were measured with the receiver operating on mains of 230 V, using the 220-230 V tapping. The volume control was at maximum, the muting control was set to give minimum muting and the receiver was tuned to the lowest wavelength on the medium band, but there was no signal input.

Voltages were measured on the 1,200 V scale of an Avometer, using the chassis as negative.

(Continued overleaf)

ACE S6—Continued

| Valve      | Anode Volts | Anode Current (mA) | Screen Volts | Screen Current (mA) |
|------------|-------------|--------------------|--------------|---------------------|
| V1 VO4*    | 220         | 0.3                | 70           | 4.0                 |
| V2 HP4106  | 190         | 6.0                | 70           | 2.2                 |
| V3 HL4 ... | 220         | 3.0                | —            | —                   |
| V4 DDT4    | 120         | Very low           | —            | —                   |
| V5 APP4120 | 215         | 29.0               | 220          | 4.5                 |
| V6 APV4200 | 340†        | —                  | —            | —                   |

\* Osc. anode (G2) 130 V, 4.1 mA.

† Each anode, A.C.

GENERAL NOTES

**Switches.**—S1-S8 are ganged in a single unit beneath the chassis, and are indicated in our under-chassis view. One of the switches in the unit, between S4 and S7, is not used. The table below gives the switch positions for the various control settings, O indicating open, and C, closed.

| Switch | M.W. | L.W. | Gram. |
|--------|------|------|-------|
| S1     | O    | C    | O     |
| S2     | C    | O    | O     |
| S3     | C    | O    | O     |
| S4     | C    | O    | O     |
| S5     | C    | O    | O     |
| S6     | C    | O    | O     |
| S7     | O    | O    | C     |
| S8     | C    | C    | O     |

S9, the Q.M.B. mains switch, is ganged with the volume control R7.

**Coils.**—These are in five screened units on the chassis deck. The coils in each unit are indicated in our plan chassis view. The I.F. units also contain the I.F. trimmers, but these are not reached through holes in the screens, as is usual. Actually the trimmers are situated at the base of each unit, and are adjusted from beneath the chassis through holes in the chassis deck. Their positions are shown in the under-chassis view.


**Scale and T.I. Lamps.**—These are both M.E.S. types marked "8V" (no current rating is shown).

**Tuning Indicator Circuit.**—This is not shown in the makers' circuit diagram, while C7 is also omitted in the makers' diagram. The indicator is of the moving-iron type, with a resistance of about 4,700 O. Of the leads from the chassis to the tuning indicator, the two yellow ones go to the lamp-holder, and the red and black ones to the positive and negative tags on the indicator casing.

**External Speaker.**—Two sockets are provided at the rear of the chassis for a high resistance external speaker.

**Condenser C12.**—This is an 8 μF 120 V D.C. working tubular dry electrolytic in our chassis, and not a 1 μF type as indicated by the makers.

**Condenser C1.**—This has a value of 0.0003 μF in our chassis, not 0.0001 μF.

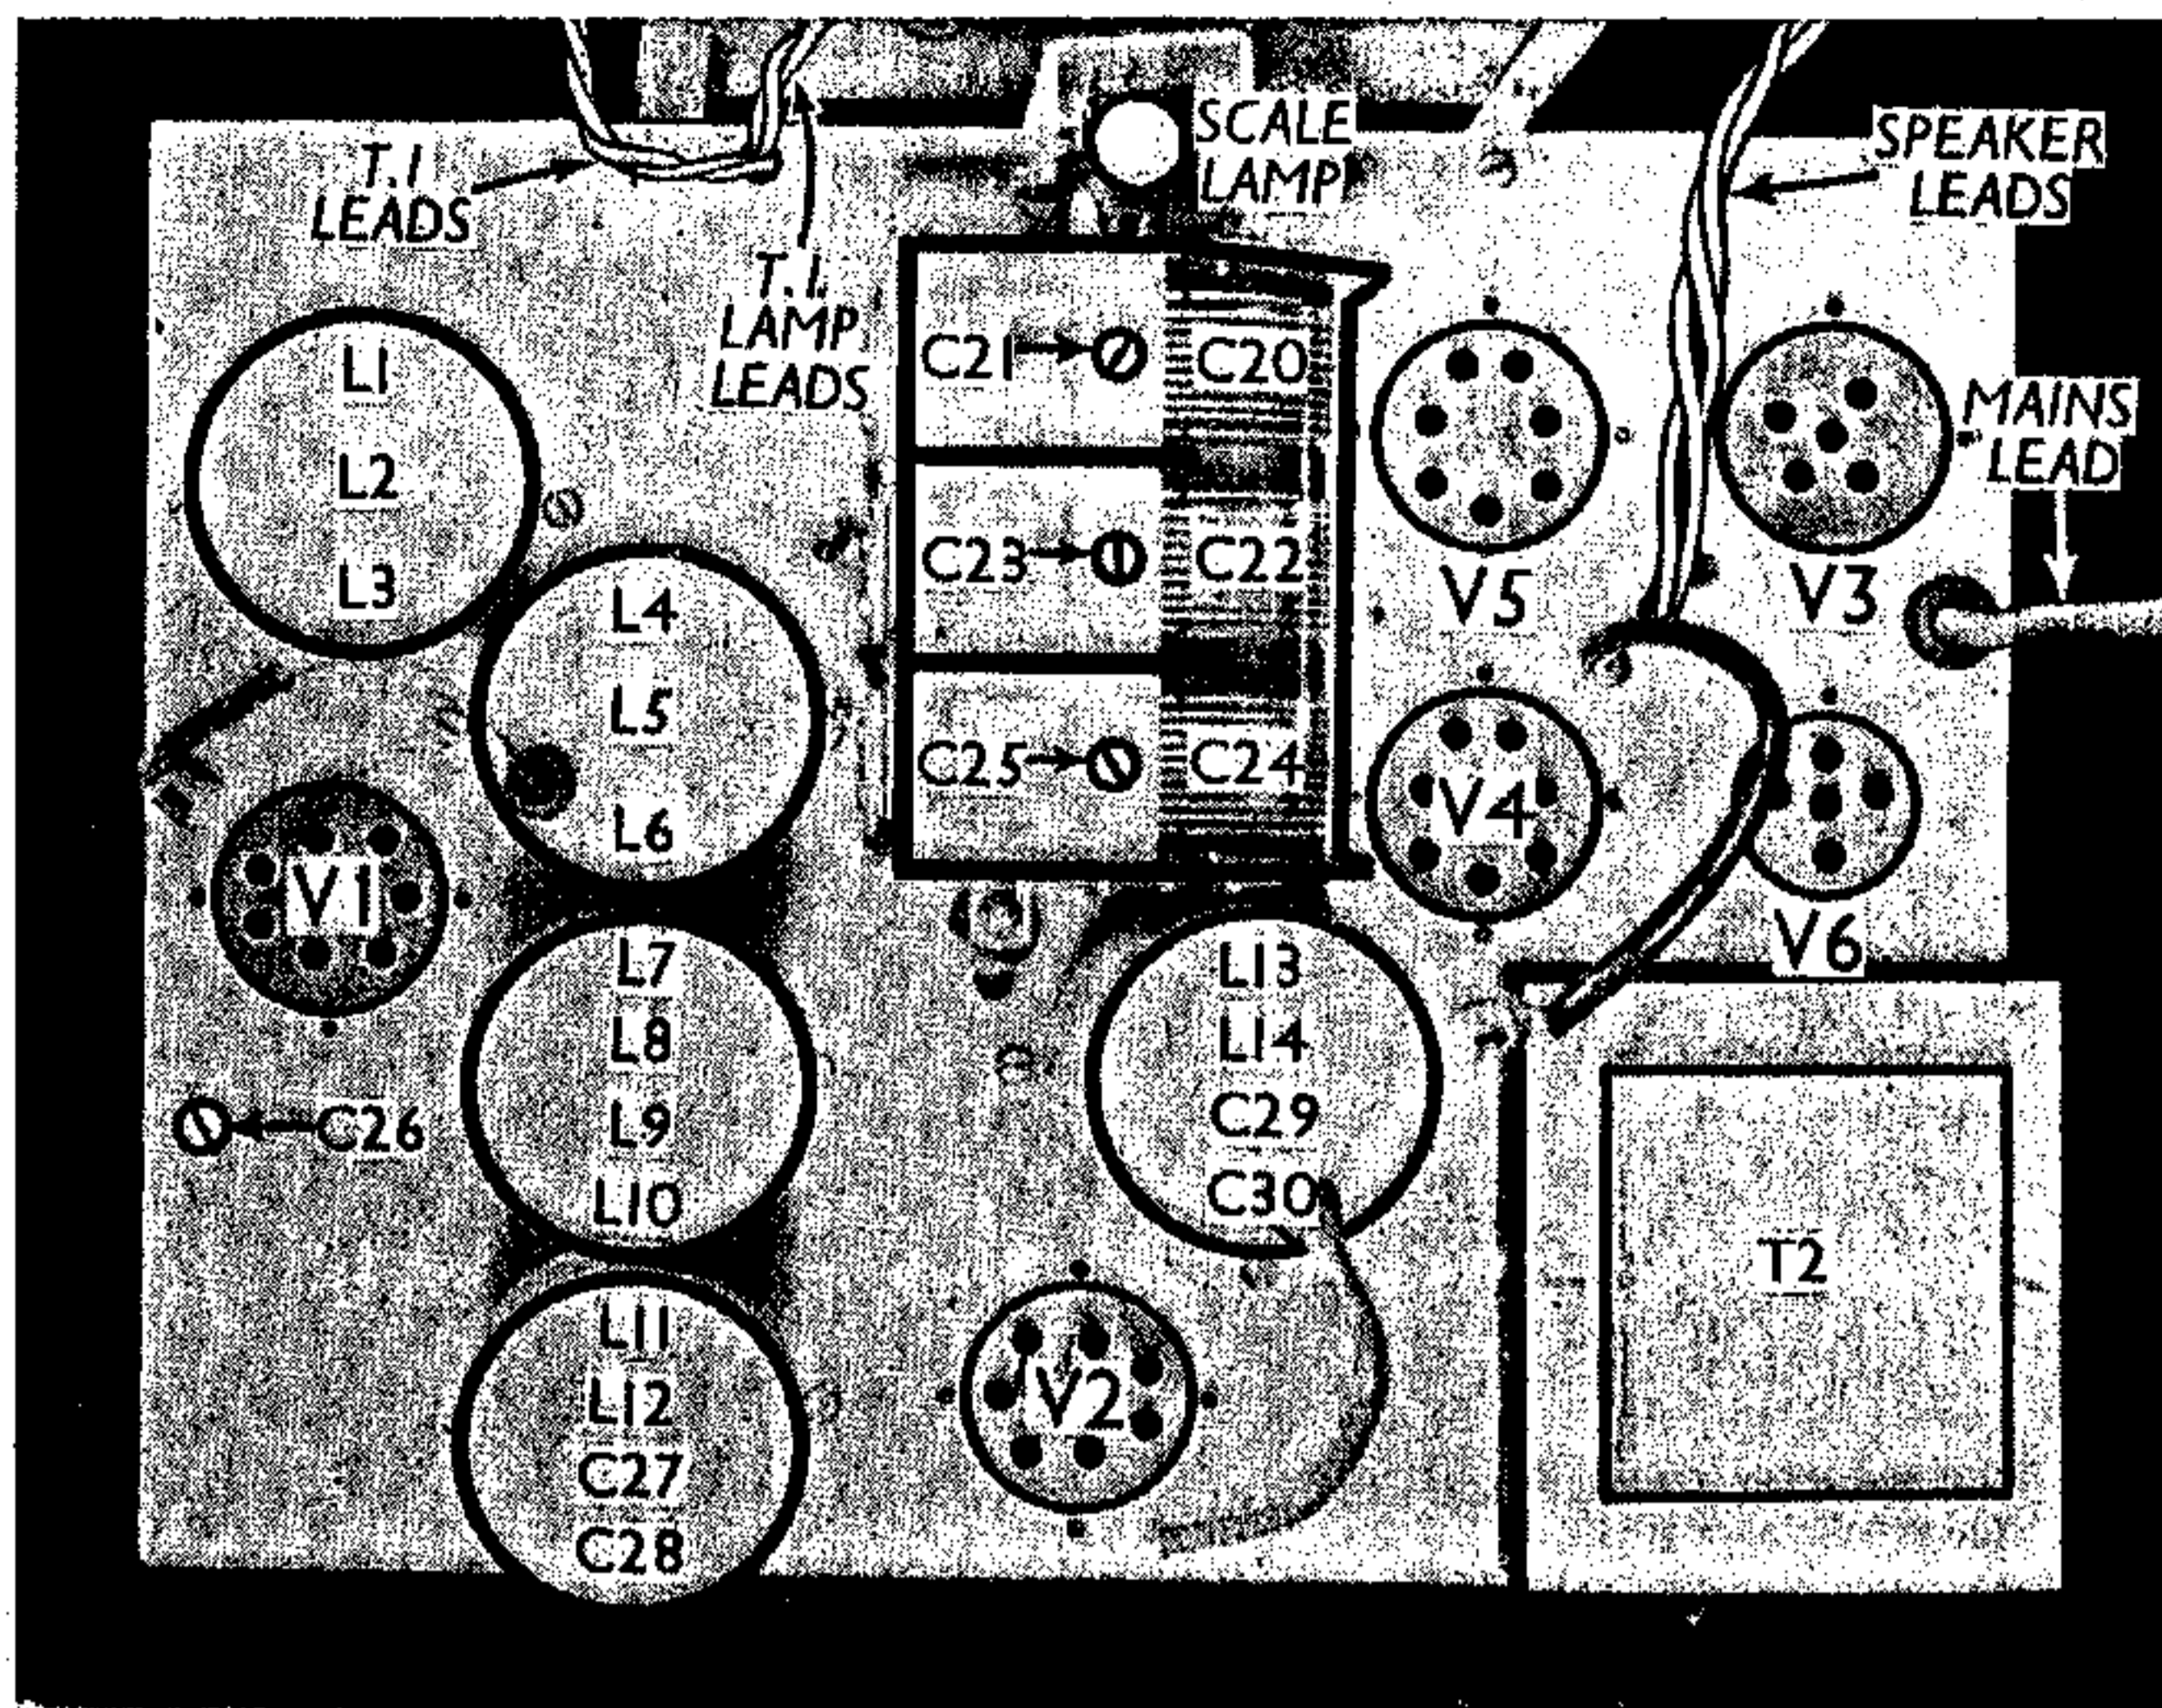

Plan view of the chassis. C26 is the variable part of the oscillator L.W. tracker. Note that the I.F. cans are not provided with holes through which the trimmers can be adjusted, since the latter are mounted at the base of each unit, and are adjusted from beneath the chassis.

**Condensers C18, C19.**—These are two 8 μF dry electrolytics, in a single unit with a common negative (black) lead. The red lead to one of the external L.S. sockets is the positive of C19, the other red lead being the positive of C18.

**Condenser C31, Resistance R19.**—These automatic G.B. components are not

shown in the makers' diagram, the cathode of V1 being taken direct to chassis.

**Condensers C26 and C32.**—The trimmer C26 in our chassis is in parallel with C32, a fixed 0.0003 μF tubular condenser. C26 is operated through a hole in the chassis deck.