

'TRADER' SERVICE SHEETS

BUSH DAC 21 AND DUG 21 A.C./D.C. SUPERHETS

FOR rectification of A.C. mains a Westinghouse metal rectifier is used in the Bush DAC21 A.C./D.C. superhet. Its receiving circuit uses three valves and a Westector, and includes provision for an extension speaker, a plug and socket device allowing the speaker in the set to be cut out of circuit. It is for use on mains of 180-260 V.

A similar chassis is fitted in the DUG21 console receiver.

CIRCUIT DESCRIPTION

Aerial input via isolating condenser **C1** and coupling coils **L1, L2** to inductively coupled band-pass filter. Primary **L3, L4** tuned by **C23**; secondary **L5, L6** tuned by **C26**; coupling coils **L8, L9**. Image suppression by coil **L5** and condenser **C2**.

First valve (**V1, Mullard metallised FC13C**), is an octode operating as frequency changer with electron coupling. Oscillator grid coils **L10, L11** tuned by **C28**; tracking by shaped plates and **C8, C31** (I.W.); anode reaction coils **L12, L13**.

Second valve, a variable-mu H.F. pentode (**V2, Mullard metallised VP13C**), operates as intermediate frequency amplifier with tuned-primary tuned-secondary transformer couplings **C32, L14, L15, C33** and **C34, L16, L17, C35**.

Intermediate frequency 123 KC/S. Second detector forms part of metal rectifier (**MR1, Westinghouse WMX12**). Audio frequency component in rectified output is developed across manual volume control **R15** and passed via coupling condenser **C15** and I.F. stopper (**V3, Mazda Pen 3520**). Fixed tone correction by condenser **C17**; two-point tone control by switch **S6** and R.C. filter **R19, C18**. Provision for connection of low-impedance external speaker across secondary of internal speaker transformer **T1**. Plug and socket arrangement enables internal speaker speech coil circuit to be broken.

Second section of metal rectifier **MR2** provides D.C. potential which is developed across resistance **R13** and fed back via decoupling circuits as G.B. to F.C.


and I.F. valves, giving automatic volume control. Delay voltage is obtained from H.T. potential divider **R11, R12**.

When the receiver is used with A.C. mains, H.T. current is supplied by a half-wave metal rectifier (**MR2, Westinghouse B27**) which, with D.C. supplies, behaves as a low resistance. Smoothing is effected by iron-cored choke **L19** and dry electrolytic condensers **C19, C20**.

Valve heaters are connected in series together with scale lamp and current regulating barretter lamp (**Philips C1**), across mains input circuit. Filter comprising chokes **L20, L21** and condenser **C21** suppresses mains-borne interference.


COMPONENTS AND VALUES

RESISTANCES		Values (ohms)
R1	V1 pentode C.G. decoupling ..	1,000,000
R2	V1 pentode C.G. stabiliser ..	250
R3	V1 fixed G.B. resistance ..	250
R4	V1 pent. anode decoupling ..	10,000
R5	V1 osc. grid resistance ..	40,000
R6	V1, V2 S.G.'s and osc. anode decoupling ..	20,000
R7	V2 C.G. decoupling ..	1,000,000
R8	V2 fixed G.B. resistance ..	1,000
R9	V2 anode decoupling ..	10,000
R10	V2 anode circuit stabiliser ..	10,000
R11	A.V.C. delay voltage potentiometer ..	100,000
R12		5,000
R13	A.V.C. rectifier load ..	1,000,000
R14	I.F. stopper ..	50,000
R15	Manual volume control ..	500,000
R16	V3 C.G. resistance ..	500,000
R17	V3 C.G. I.F. stopper ..	100,000
R18	V3 G.B. resistance ..	180
R19	Part of T.C. filter ..	10,000

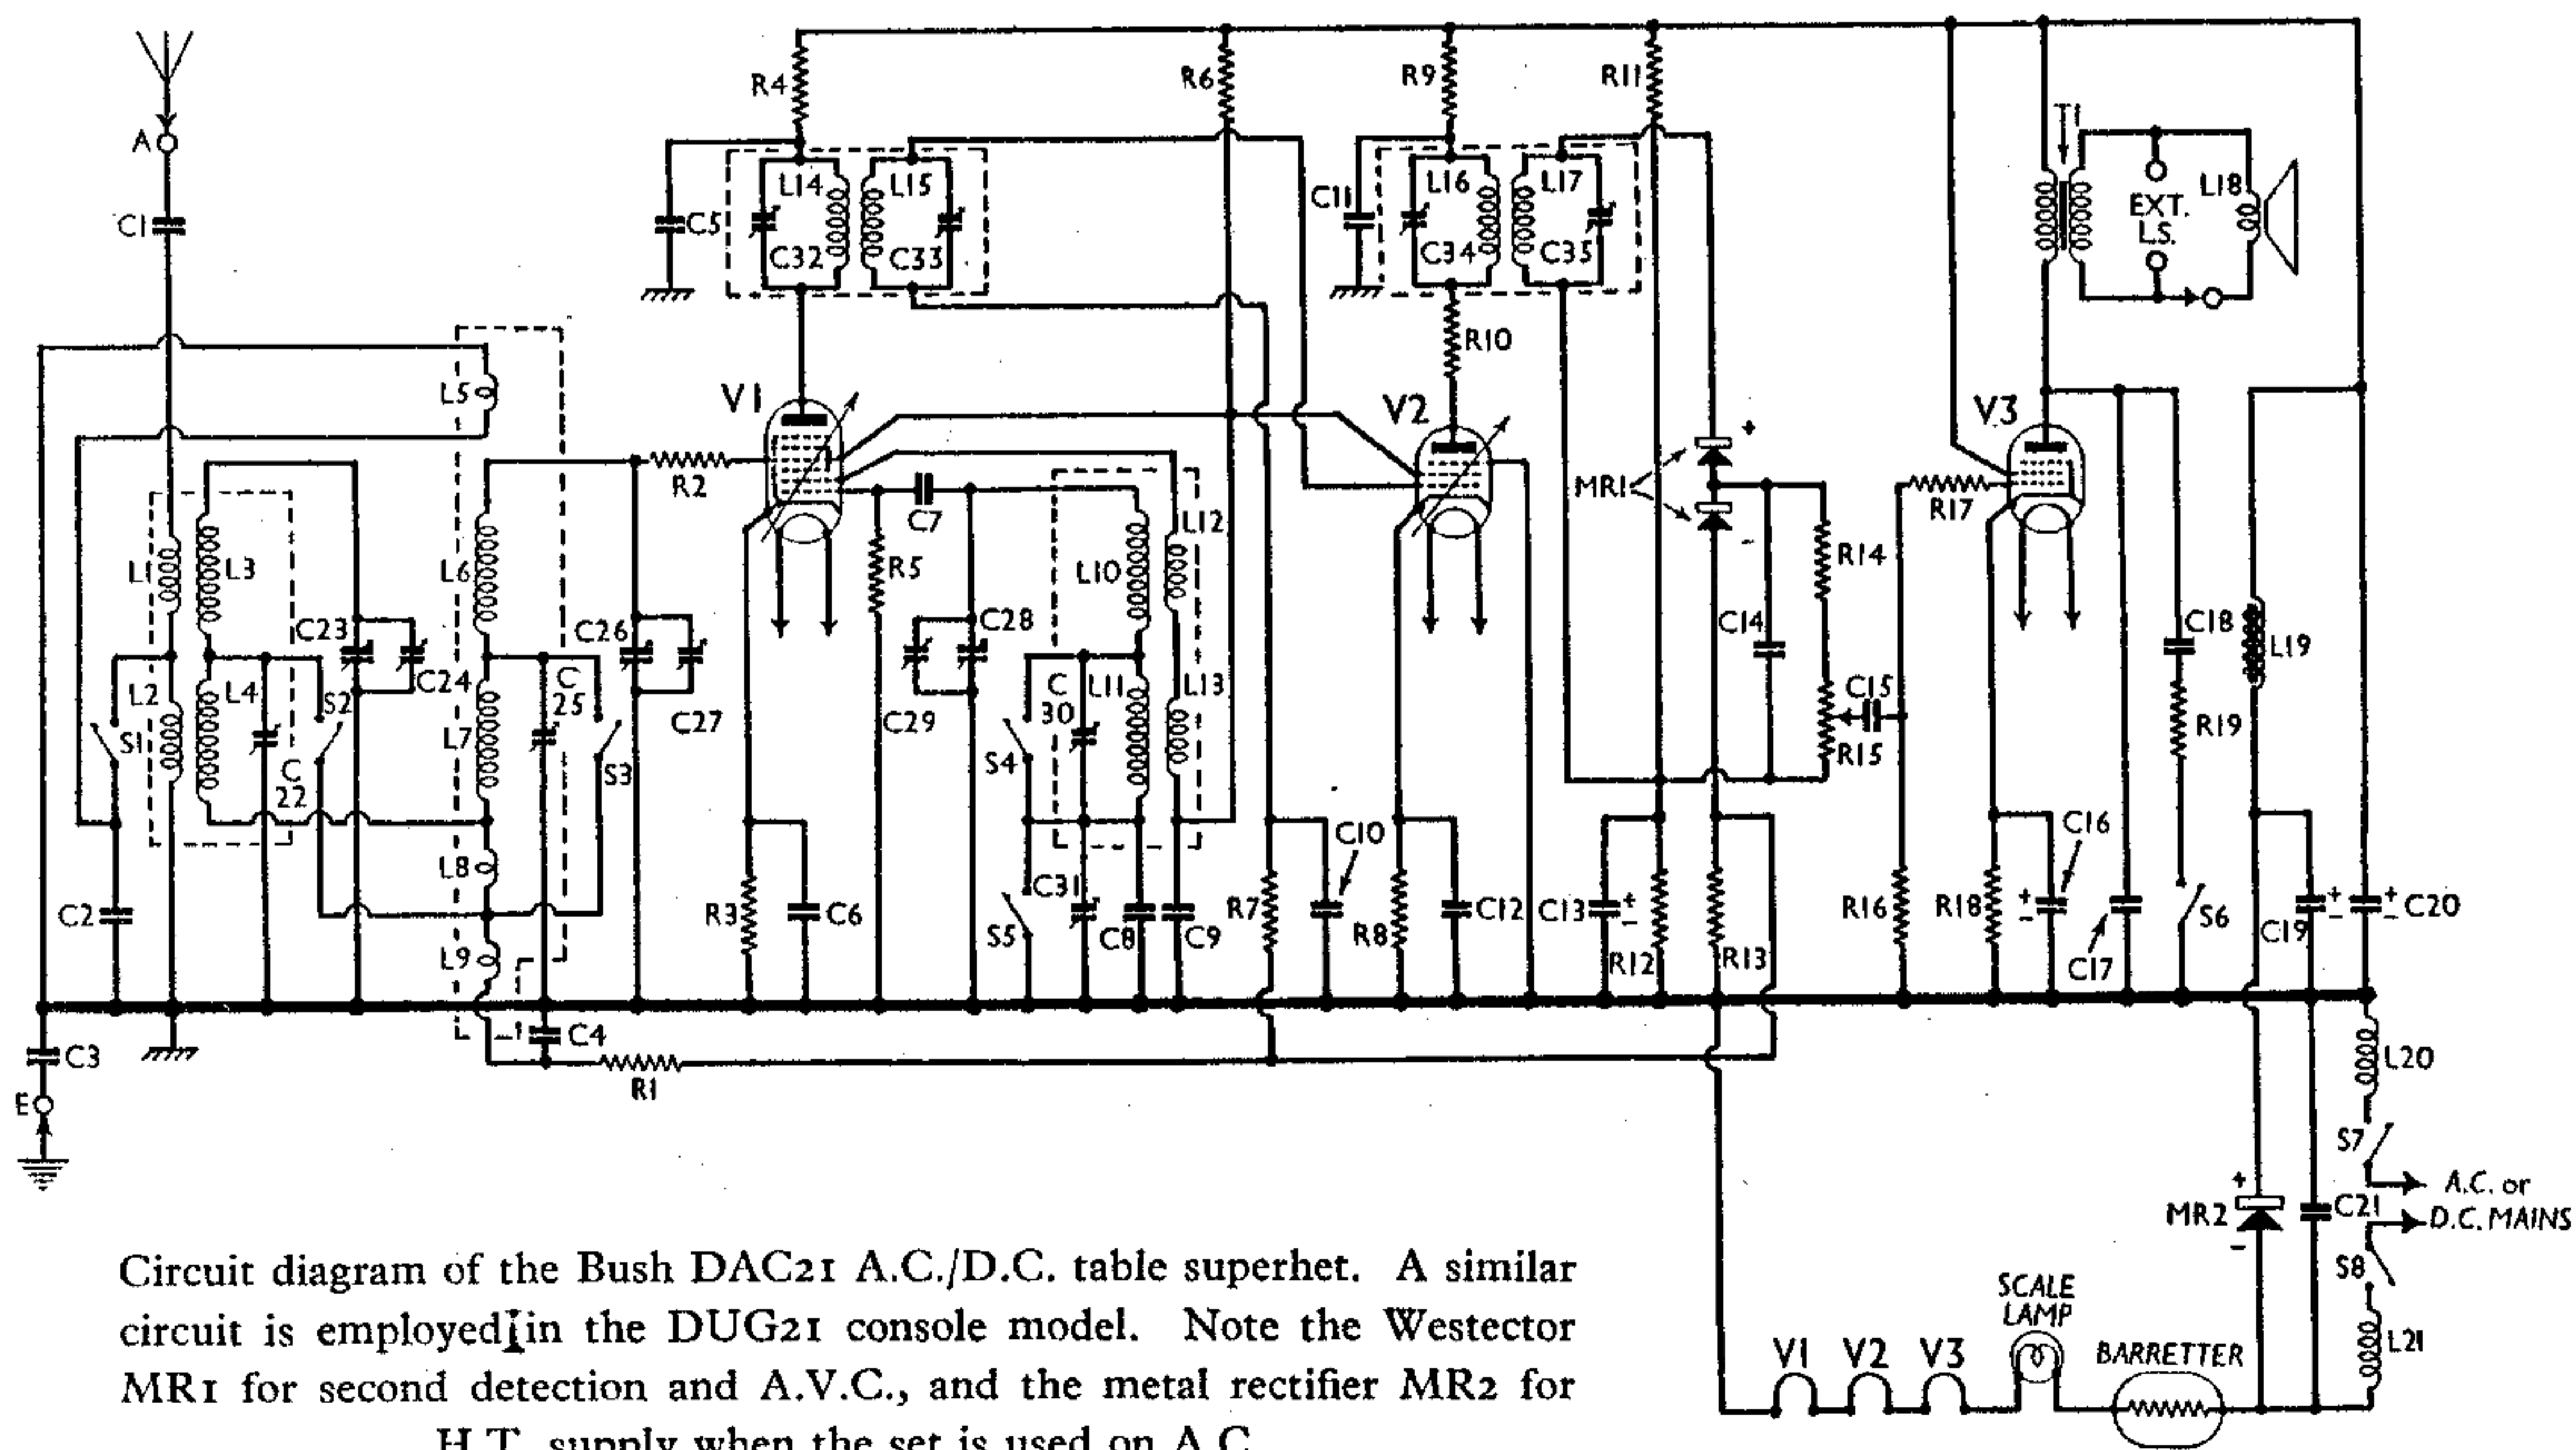

Circuit diagram of the Bush DAC21 A.C./D.C. table superhet. A similar circuit is employed in the DUG21 console model. Note the Westector MR1 for second detection and A.V.C., and the metal rectifier MR2 for H.T. supply when the set is used on A.C.

Under-chassis view. C22, C25 and C30 are adjustable through holes in the partition carrying the coil units. The coupling of L5 in the middle unit can be adjusted by a nut and screw projecting through the top of the can. Note the Westector MR1 between C13 and C16.

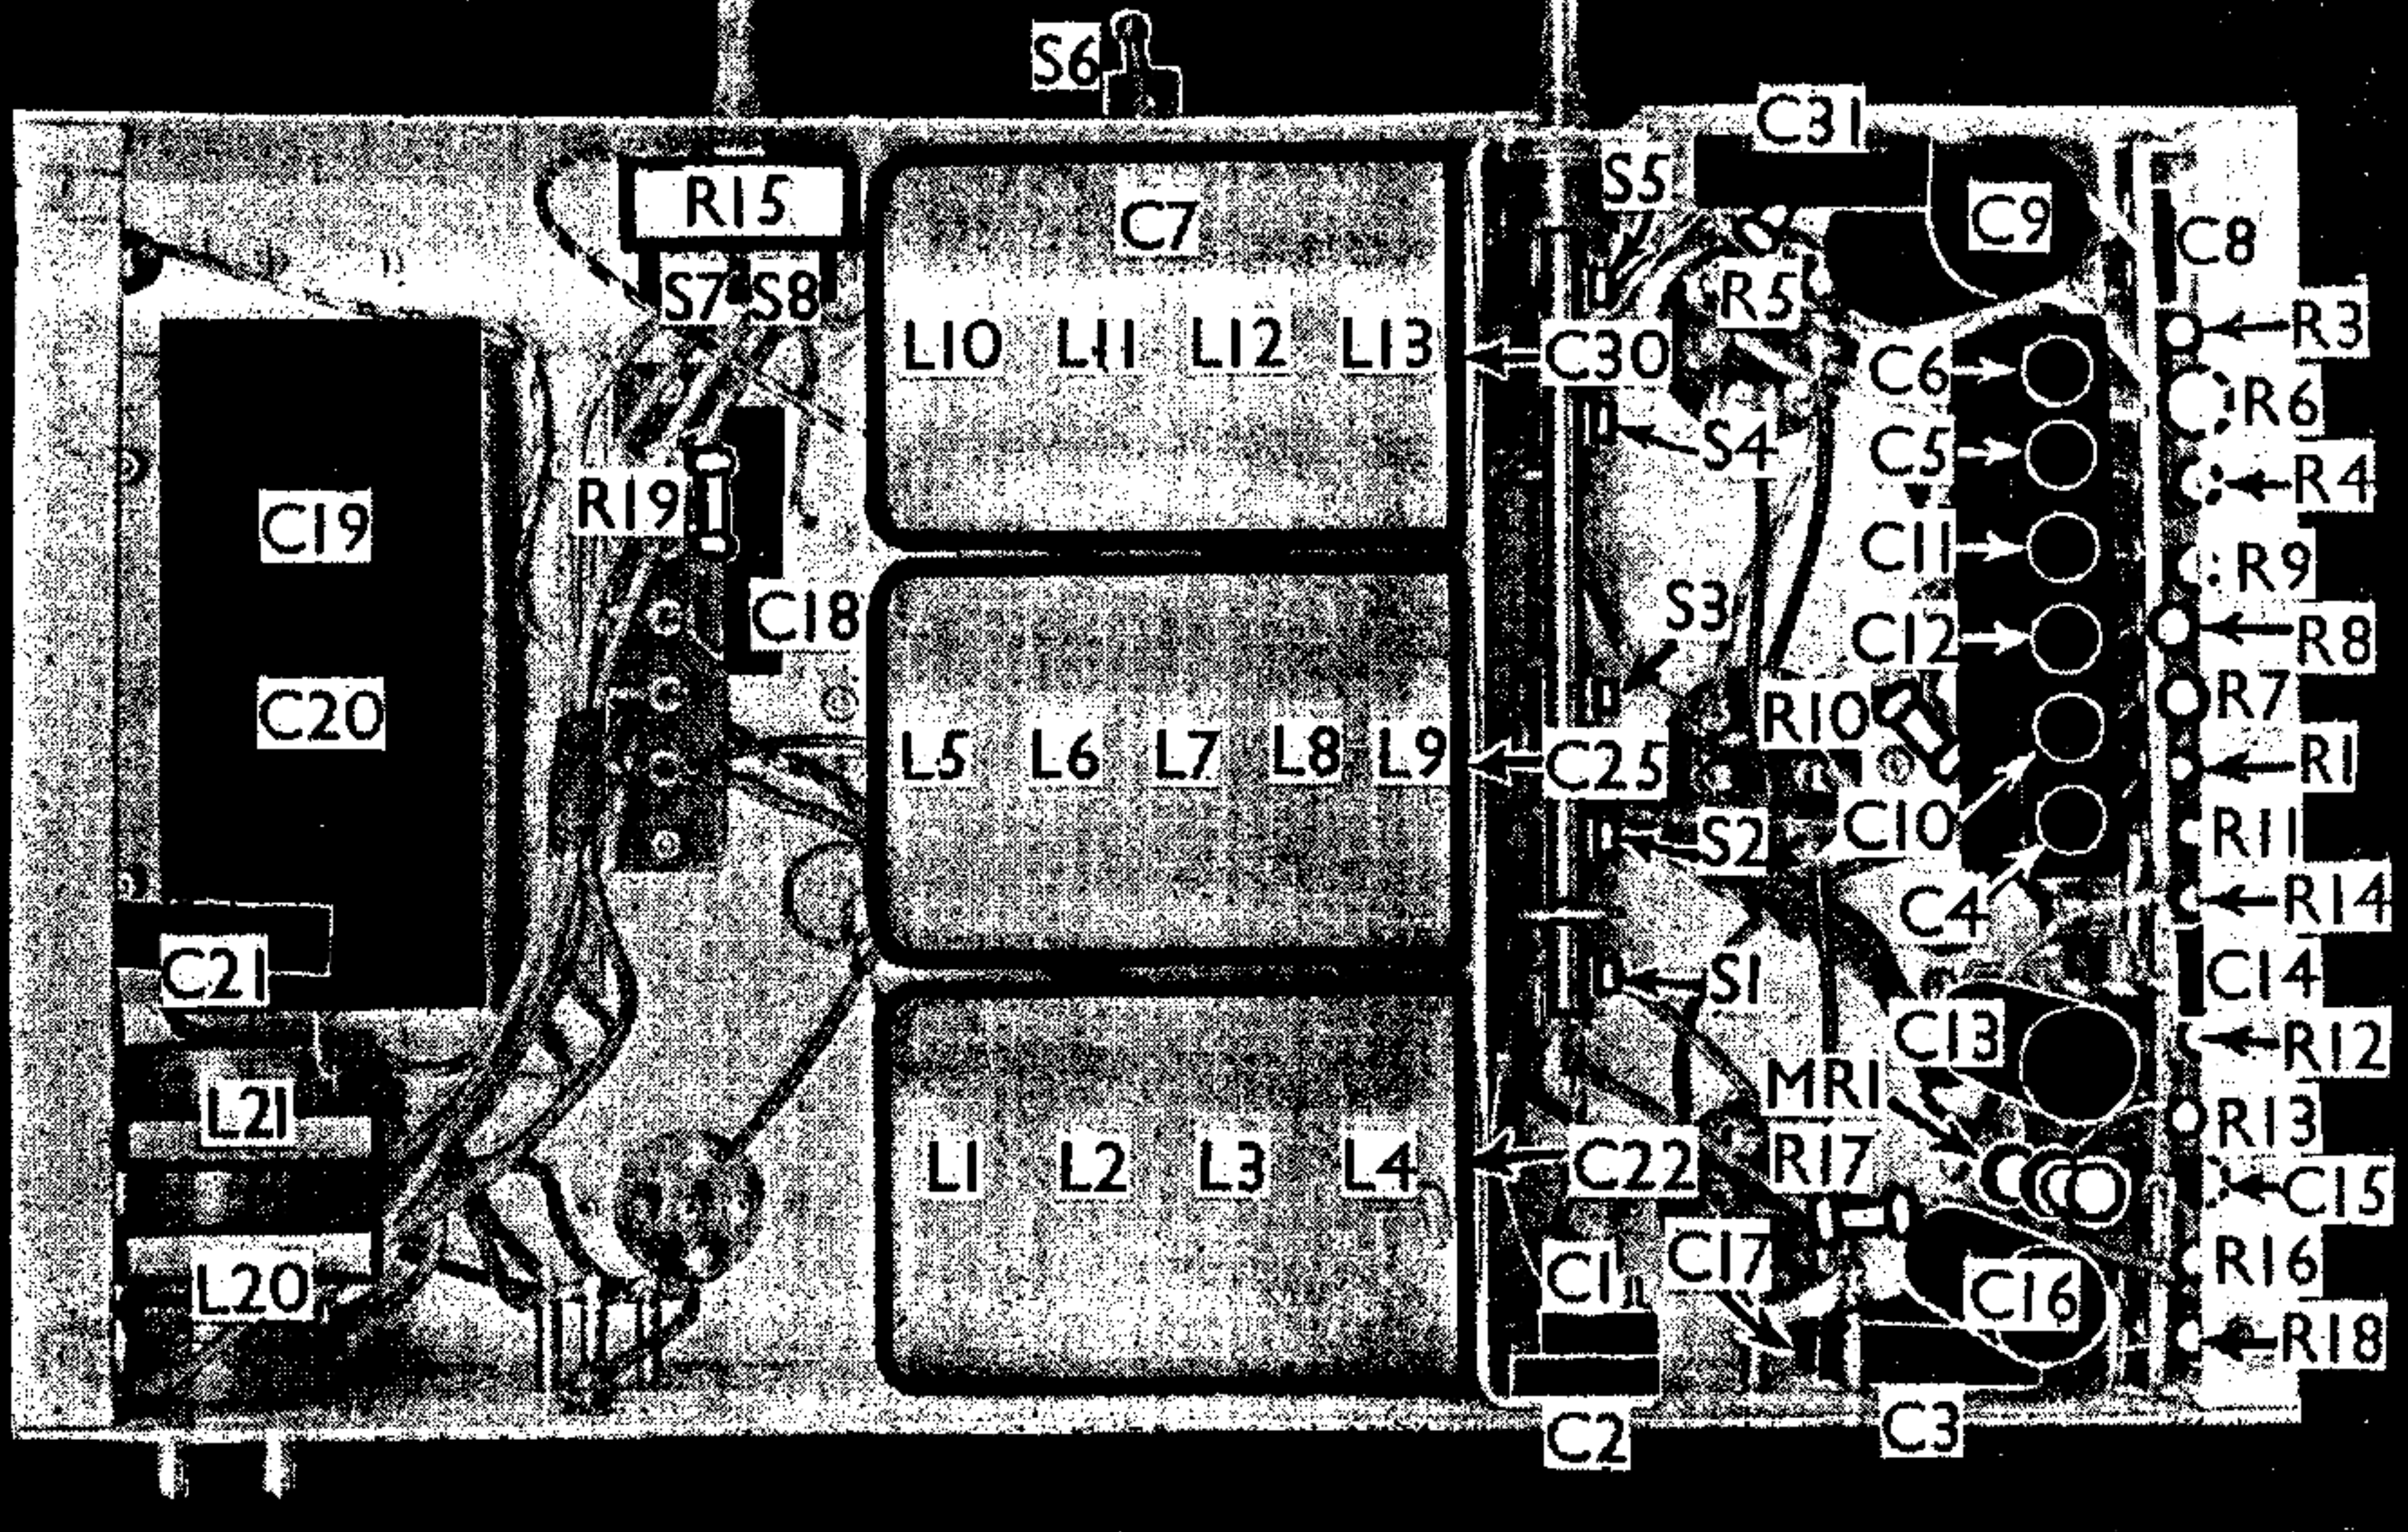

CONDENSERS		Values (μF)
C1	Aerial blocking condenser ..	0.002
C2	Part image suppression circuit	0.01
C3	Earth blocking condenser ..	0.01
C4	V1 pentode C.G. decoupling ..	0.1
C5	V1 pent. anode decoupling ..	0.1
C6	V1 cathode by-pass ..	0.1
C7	V1 osc. C.G. condenser ..	0.0005
C8	Oscillator fixed L.W. tracker ..	0.001
C9	V1, V2 S.G.'s and osc. anode decoupling ..	0.5
C10	V2 C.G. decoupling ..	0.1
C11	V2 anode decoupling ..	0.1
C12	V2 cathode by-pass ..	0.1
C13*	A.V.C. delay pot. by-pass ..	25.0
C14	I.F. by-pass ..	0.0001
C15	L.F. coupling to V3 ..	0.01
C16*	V3 cathode by-pass ..	25.0
C17	Fixed tone corrector ..	0.005
C18	Part T.C. filter ..	0.03
C19*	H.T. smoothing	16.0
C20*		24.0
C21	Mains H.F. by-pass ..	0.01
C22†	Band-pass pri. L.W. trimmer	—
C23†	Band-pass primary tuning	—
C24†	Band-pass pri. main trimmer	—
C25†	Band-pass sec. L.W. trimmer	—
C26†	Band-pass secondary tuning	—
C27†	Band-pass sec. main trimmer	—
C28†	Oscillator tuning	—
C29†	Oscillator main trimmer	—
C30†	Oscillator L.W. trimmer	—
C31†	Oscillator L.W. tracker	—
C32†	1st I.F. trans. pri. tuning	—
C33†	1st I.F. trans. sec. tuning	—
C34†	2nd I.F. trans. pri. tuning	—
C35†	2nd I.F. trans. sec. tuning	—

* Electrolytic. † Variable. ‡ Pre-set.

OTHER COMPONENTS (Continued)		Approx. Values (ohms)
L12	Oscillator reaction coils (total)	3.5
L13		
L14		
L15	1st I.F. trans. { Pri. ..	110.0
L16		Sec. ..
L17	2nd I.F. trans. { Pri. ..	110.0
L18		Sec. ..
L19	Speaker speech coil ..	1.6
L20	H.T. smoothing choke ..	155.0
L21		
T1	Mains filter chokes ..	6.3
MR1	Speaker input trans. { Pri. ..	750.0
MR2	Sec. ..	0.35
S1-S5	Signal and A.V.C. rectifier ..	—
S6	H.T. rectifier ..	—
S7, S8	Waveband switches ..	—
	Tone control switch ..	—
	Mains circuit switches ..	—

DISMANTLING THE SET

Removing Chassis.—To remove the chassis from the cabinet, first remove the back (four knurled head screws) and the three control knobs (recessed grub screws). Next remove the four bolts (with washers) holding the chassis to the bottom of the cabinet and free the speaker leads from the two cleats holding them to the side of the cabinet. The chassis can now be withdrawn to the extent of the speaker leads, which is sufficient for normal purposes.

To free the chassis entirely, unsolder the leads and *when replacing*, connect them as follows, numbering the tags from bottom to top: 1, red; 2, black; 3, green; 4, brown; 5, yellow.

Removing Speaker.—To remove the speaker from the cabinet, remove the nuts and washers from the four bolts with ornamental heads holding it to the cabinet front. *When replacing*, see that the transformer is on the right.

VALVE ANALYSIS

Valve voltages and currents given in the table (Col. 3) are those measured in our receiver when it was operating on

A.C. mains of 230 V. The set was tuned to the lowest wavelength on the medium band and the volume control was at maximum, but there was no signal input.

Voltages were measured on the 1,200 V scale of an Avometer, with chassis as negative.

Valve	Anode Volts	Anode Current (mA)	Screen Volts	Screen Current (mA)
V1 FC13C*	205	2.1	90	4.2
V2 VP13C	175	2.3	90	0.8
V3 Pen3520	208	40.0	240	9.5

* Osc. anode (G2) 95 V, 1.6 mA.

GENERAL NOTES

Switches.—S1-S5 are the waveband switches, in a single unit beneath the chassis, seen in our under-chassis view. The switches are all *closed* on the M.W. band and *open* on the L.W. band.

S6 is the Q.M.B. tone control switch which is *open* when the knob is pushed to the right.

S7 and S8 form the double-pole Q.M.B. mains switch, gauged with the volume control R15.

Coils.—The signal frequency and oscillator coils, L1-L13, are in three screened units beneath the chassis. L5, in the middle unit, is an image suppressor coil, and its coupling to the other coils in the unit is adjustable by means of the nut on a screw projecting through the top of the screen.

The L10-L13 unit also contains the fixed condenser C7. The screen of this unit cannot be removed until the volume control and mains switch unit is detached. This can be done without unsoldering any wiring.

The three coil units also contain the L.W. trimmers C22, C25 and C30

OTHER COMPONENTS		Approx. Values (ohms)	
L1	Aerial coupling coils ..	1.5	
L2			6.0
L3			3.0
L4	Band-pass primary coils	12.0	
L5		Image suppression coil ..	Very low
L6	Band-pass secondary coils	3.0	
L7			12.0
L8	Band-pass coupling coil	3.5	
L9			0.5
L10			3.5
L11	Oscillator tuning coils ..	3.5	
L12			8.5

(Continued overleaf)

BUSH DAC2I (Continued)

respectively, which are adjustable through holes in the partition carrying the coil units.

The I.F. transformers **L14**, **L15** and **L16**, **L17** are in two screened units on

dry electrolytics in a single block beneath the chassis. The black lead is the common negative, the red the positive of **C19** ($16 \mu\text{F}$) and the yellow the positive of **C20** ($24 \mu\text{F}$).

CIRCUIT ALIGNMENT

For best results a signal generator and

L.W. re-alignment, set the receiver to L.W., with the tuning pointer at 1,000 m., and inject a 1,000 m. signal from the generator.

Adjust **C30**, **C25** and **C22** (beneath the chassis, through holes in the coil unit partition), for maximum output.

Now set the signal generator to 1,000 m., tune set to 1,000 m. on the scale and