


gez. 4.9.62	Art der Änderung	gepr.
gepr. 4.9.62	Mod. Nr.	MT 7
Nm.	Gez. Nr.	MT 7 F
gez.	Art der Änderung	
Wertstoff:	Mod. Nr.	
	Gez. Nr.	
	Art der Änderung	
	Mod. Nr.	
	Gez. Nr.	

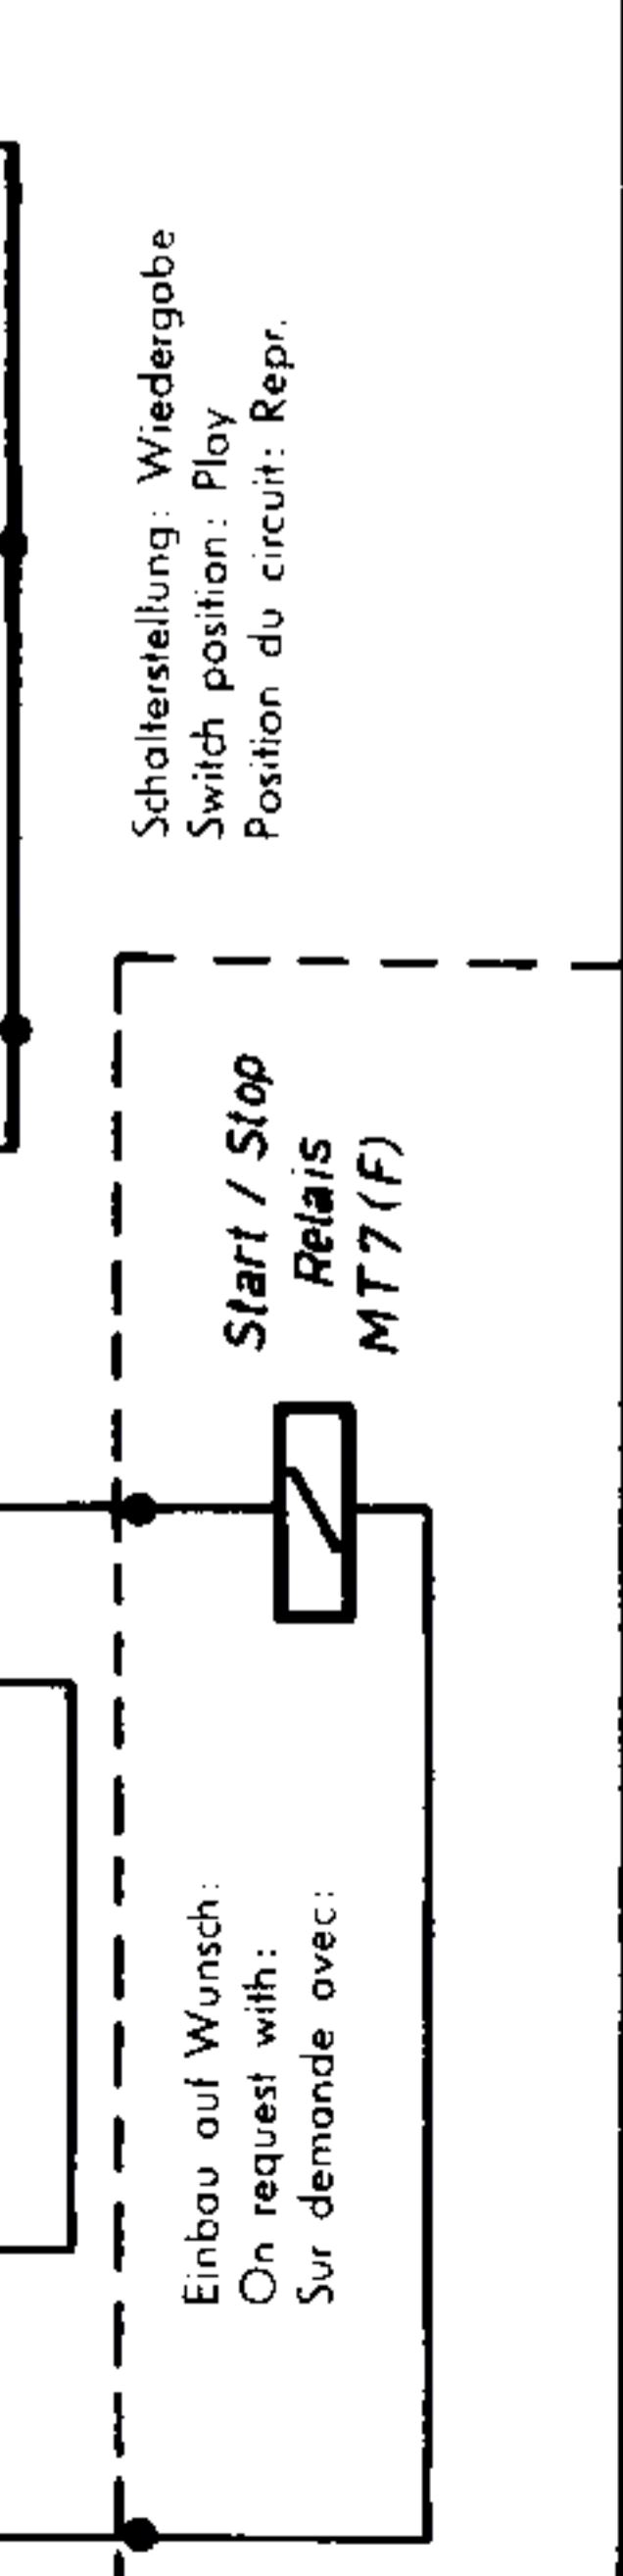

Schalterstellung: Wiedergabe  
 Switch position: Play  
 Position du circuit: Repr.

**Start / Stop Relais MT7 (F)**

Einbau auf Wunsch:  
 On request with:  
 Sur demande avec:

Kurzschlussbügel  
 shorting bar  
 Clet de court-circuit

Netzteile  
 Power pack  
 Alimentation secteur

Auf Wunsch  
 On request  
 Sur demande  
 120/240 V

Netzteil  
 Power pack  
 Alimentation secteur

Einbau auf Wunsch:  
 On request with:  
 Sur demande avec:

**Start / Stop Relais MT7 (F)**

Einbau auf Wunsch:  
 On request with:  
 Sur demande avec:



# **BUTOBA MT 7**

**Modern, smart, adaptable, reliable and superb quality of performance - ideal for music or speech**

**Power supply:**

**Your BUTOBA can be operated either by:**

- 1) 4 ordinary U 2 type leakproof torch batteries (1,5 V each)
- 2) or a rechargeable battery  
(SONNENSCHN 3 G x 3/U - 2,6 A. H.)
- 3) or a 6 V or 12 V car battery
- 4) or a mains converter 110 - 220 V  
or 120 - 240 V (50 - 60 cycles) - on request.

**BUTOBA Model MT 7 F**

**Recorder with built-in remote control facility and stop-start switching on the microphone.**

**Simple to operate:**

Easily accessible push buttons enable the MT 7 to be operated even in its carrying case.

**Safety lock button:**

To avoid accidental erasing a red lock button as well as the record button have to be pressed before recording.

**Sockets:**

Microphone 200-500 ohms 0,15 mv, Radio input 100 K ohms  
Outputs 1 K ohm (headphones)  
4 ohms (loudspeaker).

**Pause control:**

For short interruptions while recording or playing back.

**Two speeds:**

3 3/4 " i. p. s. and 1 7/8 " i. p. s.  
Speed change lever easily operated.

**Recording level indicator:**

Magic eye.

**Frequency Response:**

100 - 12000 cycles at 3 3/4 i. p. s.,  
100 - 5000 cycles at 1 7/8 i. p. s.

**Constant speed:**

First class transistor regulated D. C. motor at 3 3/4 " speed variation better than  $\pm 0,5 \%$

**Recording telephone conversations:**

Possible with an adaptor available as an accessory.

**Connection of external loudspeaker:**

The built-in loudspeaker is automatically switched off when the connecting cable of an external speaker is plugged in.