


CHASSIS LAY-OUT (left) AND CIRCUIT DIAGRAM--KOLSTER-BRANDES MODEL PP251

- Capacitors.**
- C1 80 pF. (5%)
 - C2 100 pF. (5%)
 - C5 110 pF. (5%)
 - C6 200 pF. (5%)
 - C8 335 pF. (2%)
 - C9 390 pF. (2%)
 - C10 0.04
 - C11 0.04
 - C12 110 pF. (5%)
 - C13 200 pF. (5%)
 - C14 0.04
 - C15 100 pF.
 - C16 0.005 (500 v.)
 - C17 0.04
 - C19 0.001 (500 v.)
 - C20 25 (35 v.)
 - C21 0.003 (300 v. A.C.)
 - C22 100 (35 v.)
 - C23 50 (300 v.)
 - C24 50 (300 v.)
 - C25 0.02 (300 v. A.C.)
- Resistors.**
- R1 4.7M
 - R3 3.3M
 - R4 330 (10%)
 - R5 33k
 - R6 22k
 - R7 3.9M (10%)
 - R8 180 (10%)
 - R9 1M
 - R10 100k
 - R11 10M
 - R12 3.3M
 - R13 1M
 - R14 180 (10%)
 - R15 2.2M
 - R16 100k
 - R17 680 (10%)
 - R18 CZ10
 - R19 1.2k (1 W., 5%)
 - R20 3.4k (2.5 W., 5%)
 - R21 580 (1 W., 5%)
 - R22 580 (1 W., 5%)
 - R23 1.8k (2.5 W., 5%)
 - R24 1.2k (2 W., 10%)
 - R25 510 (3 W., 5%)

Volume control 1M

Ned. Ver. v. Historie v/d Radio

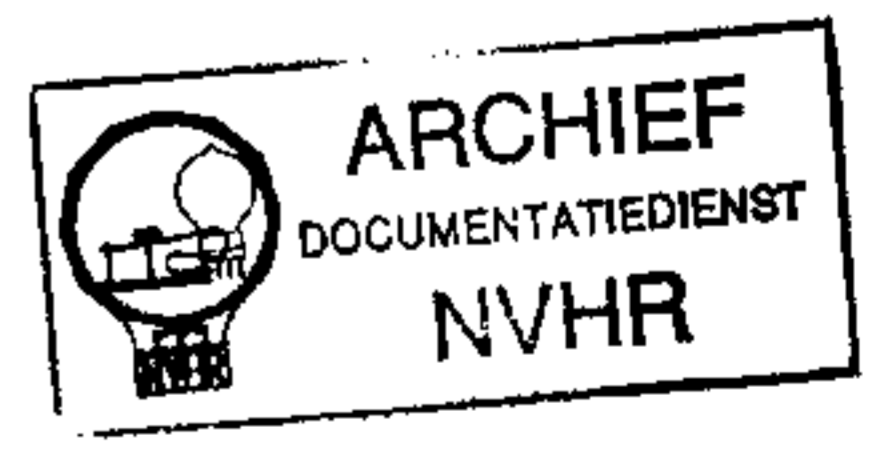

UNDER
T2 T1
↓ ↓

L.W. M.W. OFF

VOL.

R20, 21, 22, 23, 25.

