


EAF 42

EBC 41


EL 41

ECH 42

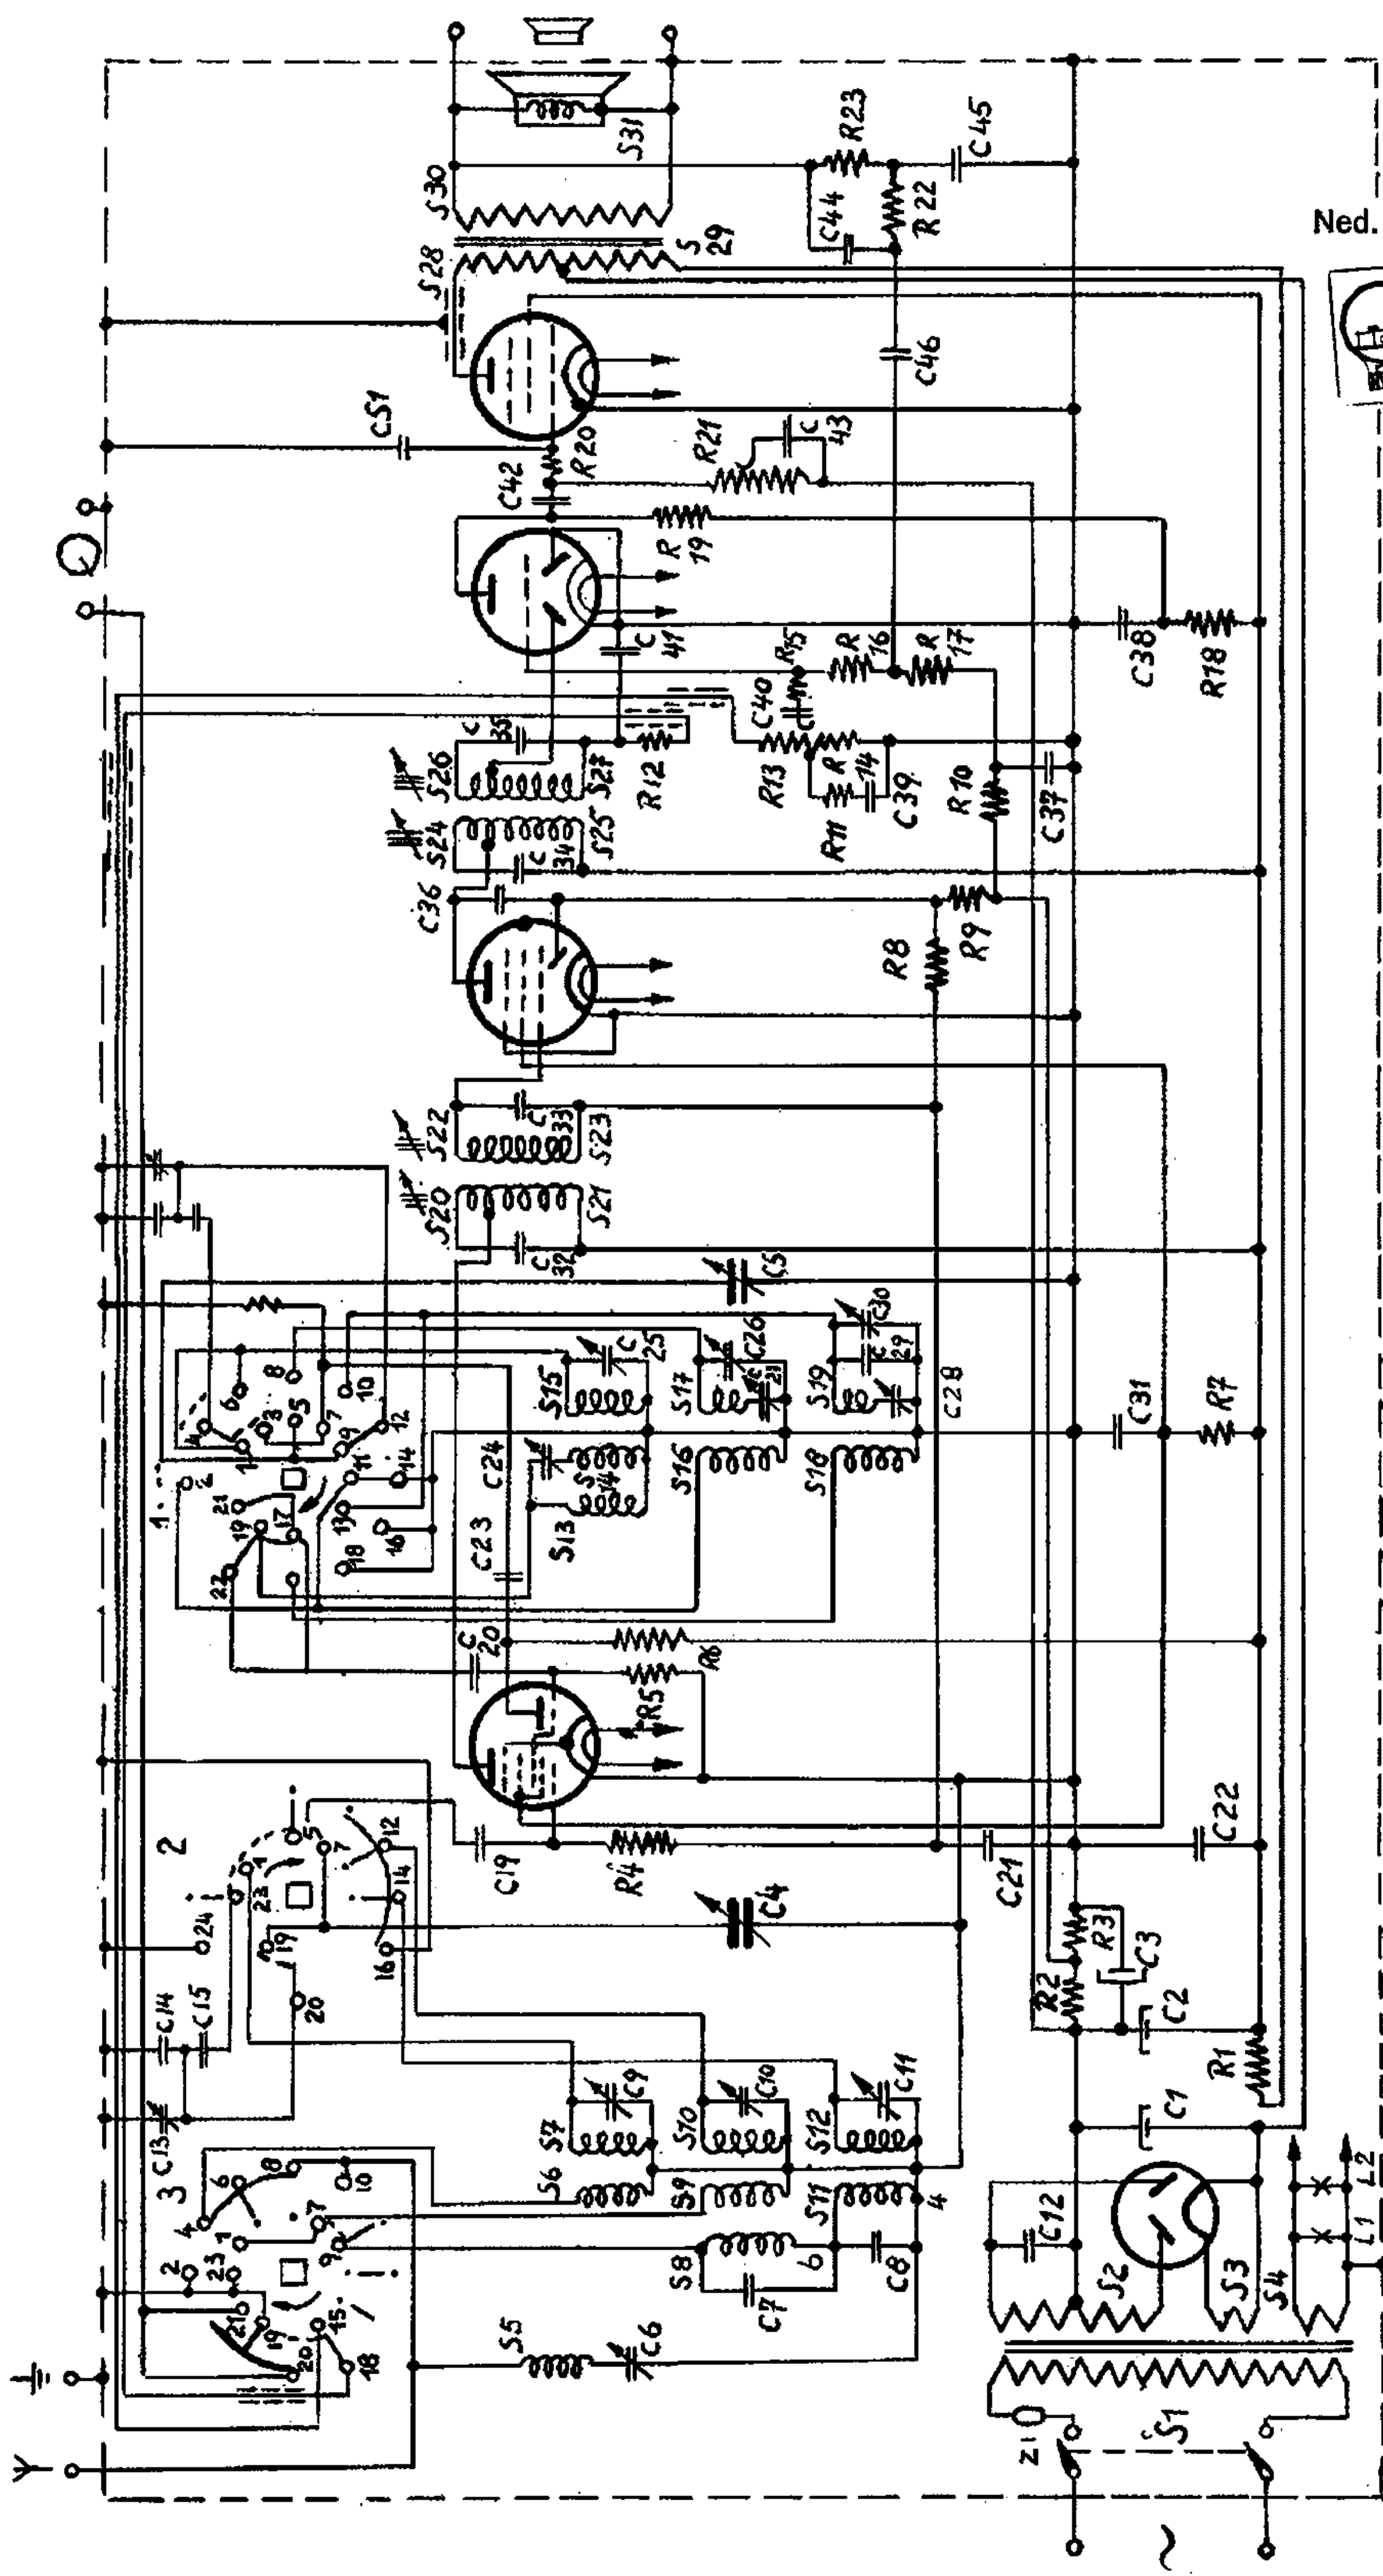

243 A


Ned. Ver. v. Historie v/d Radio

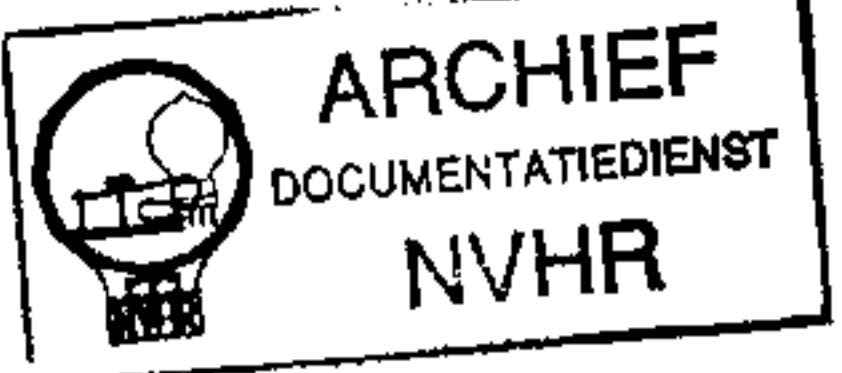

SIERA

ZF = 452 kHz

AZ41

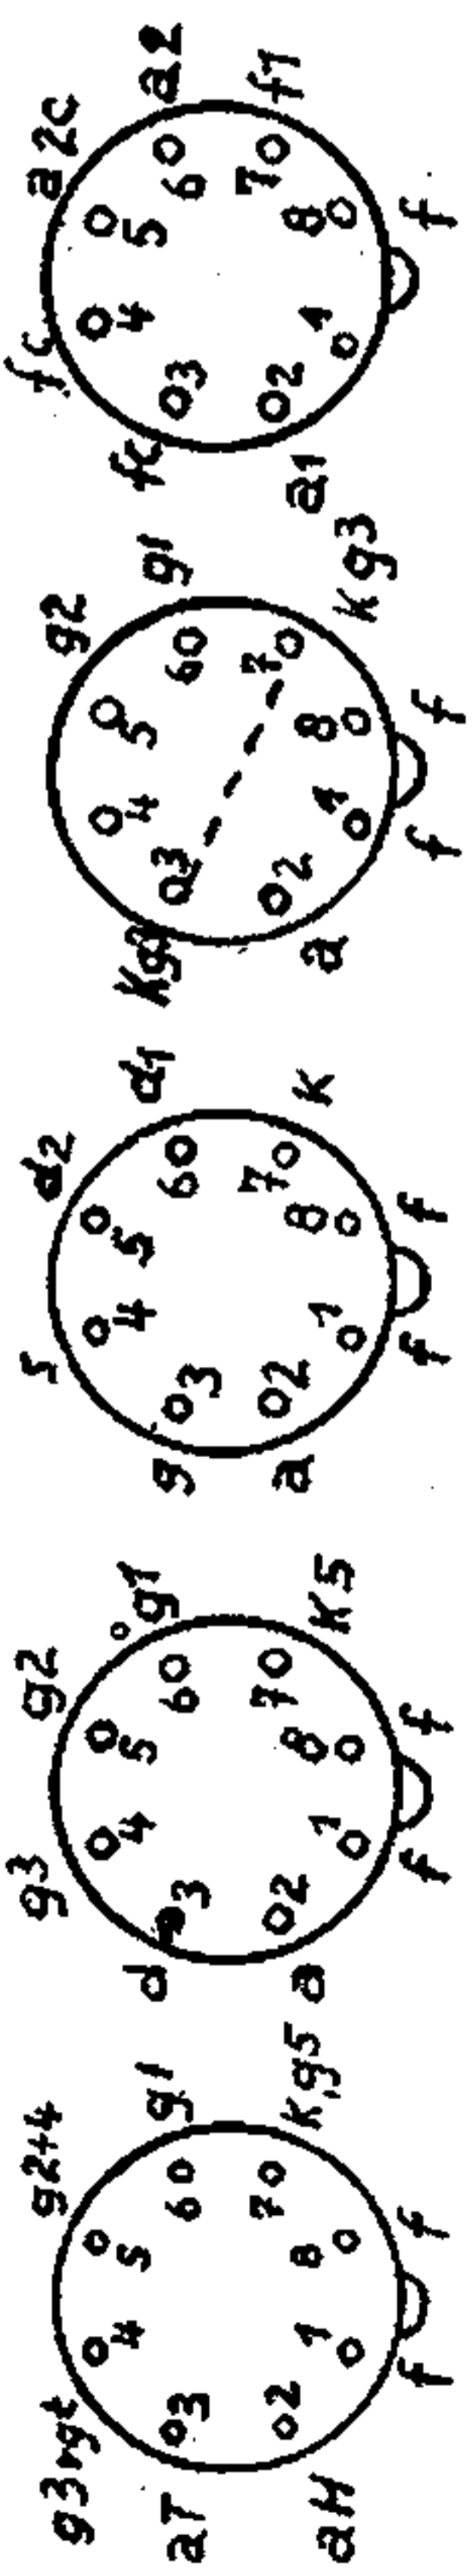

SPOELEN-COILS-BOBINES-SPULEN

S1				S16	4	Ohm	
S2				S17	7	Ohm	
S3			A3 141 63.1	S18	8	Ohm	A3 121 87.0
S4				S19	20	Ohm	
Z1				S20	3,2	Ohm	
S5	34	Ohm		S21	4,5	Ohm	
C6			A3 140 08.0	S22	3,2	Ohm	A3 121 94.1
S6	2,4	Ohm		S23	4,5	Ohm	
S7	<1	Ohm	A3 121 88.0	C32			
S8	50	Ohm	A3 111 77.0	C33			
S9	2,4	Ohm		S24	3,2	Ohm	
S10	5,5	Ohm		S25	4,5	Ohm	
S11	170	Ohm	A3 121 86.0	S26	3,2	Ohm	A3 121 94.1
S12	42	Ohm		S27	4,5	Ohm	
S13	2	Ohm		C34			
S14	1	Ohm	A3 121 89.1	C35			
S15	<1	Ohm		S28	730	Ohm	
				S29	730	Ohm	A3 151 15.0
				S30	<1	Ohm	

CONDENSATOREN-CONDENSERS-CONDENSATEURS-KONDENSATOREN

C1	50	uF	48 317 09/50+50	C24	175	pF	49 005 52.0
C2	50	uF		C25	30	pF	28 212 36.4
C3	100	uF	28 185 68.0	C26	30	pF	28 212 36.4
C4	12-492	pF	49 001 31.0	C27	400-575	pF	49 005 55.0
C5	12-492	pF		C28	175	pF	49 005 52.0
C6	30	pF	Zie spoelen, see coils, voir bobines siehe Spulen	C29	22	pF	48 406 10/22E
C7	6,8	pF	48 406 99/6E8	C30	30	pF	28 212 36.4
C8	39	pF	48 406 10/39E	C31	47000	pF	48 751 20/47K
C9	30	pF	28 212 36.4	C32	115	pF	Zie spoelen
C10	30	pF	28 212 36.4	C33	115	pF	See coils
C11	30	pF	28 212 36.4	C34	115	pF	Voir bobines
C12	22000	pF	48 758 20/22K	C35	115	pF	Siehe Spulen
C13	30	pF	28 212 36.4	C36	22	pF	48 406 10/22E
C14	96	pF	48 406 02/96E	C37	0,15	uF	48 750 20/150K
C15	235	pF	48 406 01/235E	C38	0,1	uF	48 751 20/100K
C16	96	pF	48 406 02/96E	C39	33000	pF	48 750 20/33K
C17	235	pF	48 406 01/235E	C40	22000	pF	48 750 20/22K
C18	30	pF	28 212 36.4	C41	47	pF	48 406 20/47E
C19	100	pF	48 406 20/100E	C42	22000	pF	48 751 20/22K
C20	33	pF	48 406 20/33E	C43	10000	pF	48 750 20/10K
C21	47000	pF	48 750 20/47K	C44	100	pF	48 406 10/100E
C22	47000	pF	48 751 20/47K	C45	680	pF	48 407 20/680E
C23	220	pF	48 406 20/220E	C46	2200	pF	48 751 20/22K2
				C51	47	pF	48 406 20/47E

WEERSTANDEN-RESISTANCES-WIDERSTANDE

R1	1200	Ohm	48 468 10/1K2	R13	0,275	MOhm	49 500 96.0
R2	100	Ohm	48 426 10/100E	R14	0,075	MOhm	
R3	33	Ohm	48 426 10/33E	R15	0,47	MOhm	48 425 10/470K
R4	0,82	MOhm	48 425 10/820K	R16	1,5	MOhm	48 426 10/1M5
R5	47000	Ohm	48 425 10/47K	R17	0,15	MOhm	48 427 10/150K
R6	33000	Ohm	48 427 10/33K	R18	0,82	MOhm	48 426 10/820K
R7	34000	2 Ohm	48 427 10/68K	R19	0,22	MOhm	48 427 10/220K
R8	1	MOhm	48 425 10/1M	R20	47000	Ohm	48 425 10/47K
R9	1	MOhm	48 425 10/1M	R21	0,5	MOhm	49 473 04.0
R10	1,5	MOhm	48 425 10/1M5	R22	0,18	MOhm	48 425 10/180K
R11	10000	Ohm	48 425 10/10K	R23	0,22	MOhm	48 425 10/220K
R12	56000	Ohm	48 425 10/56K	R24	68000	Ohm	48 425 10/68K