


RESISTANCE READINGS

ITEM	TUBE	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9	PIN 10
V1	12AX7	—	330K	0	—	—	—	0.7K	3.3K	—	—
V2	12AX7	—	330K	0	—	—	—	0.7K	3.3K	—	—
V3	12AX7	—	700K	1.1K	—	—	—	700K	1.8K	—	—
V4	12AX7	—	300Ω	—	—	—	—	300Ω	—	—	—
V5	7408	—	—	—	—	—	—	—	—	—	—
V6	7408	—	—	—	—	—	—	—	—	—	—
V7	7408	—	—	—	—	—	—	—	—	—	—
V8	7408	—	—	—	—	—	—	—	—	—	—
V9	7408	—	—	—	—	—	—	—	—	—	—

NOTES

- 1- UNLESS OTHERWISE SPECIFIED—
- 1- ALL RESISTANCE VALUES IN OHMS ± 10 %.
- 2- ALL RESISTORS 1/2 WATT.
- 3- ALL CAPACITORS WITH DECIMAL VALUES IN MFD.
- 4- ALL CAPACITORS WITHOUT DECIMAL VALUES IN MFD.
- 5- ALL VOLTAGES ARE DC B MAY VARY ± 20%.

8486
84863310

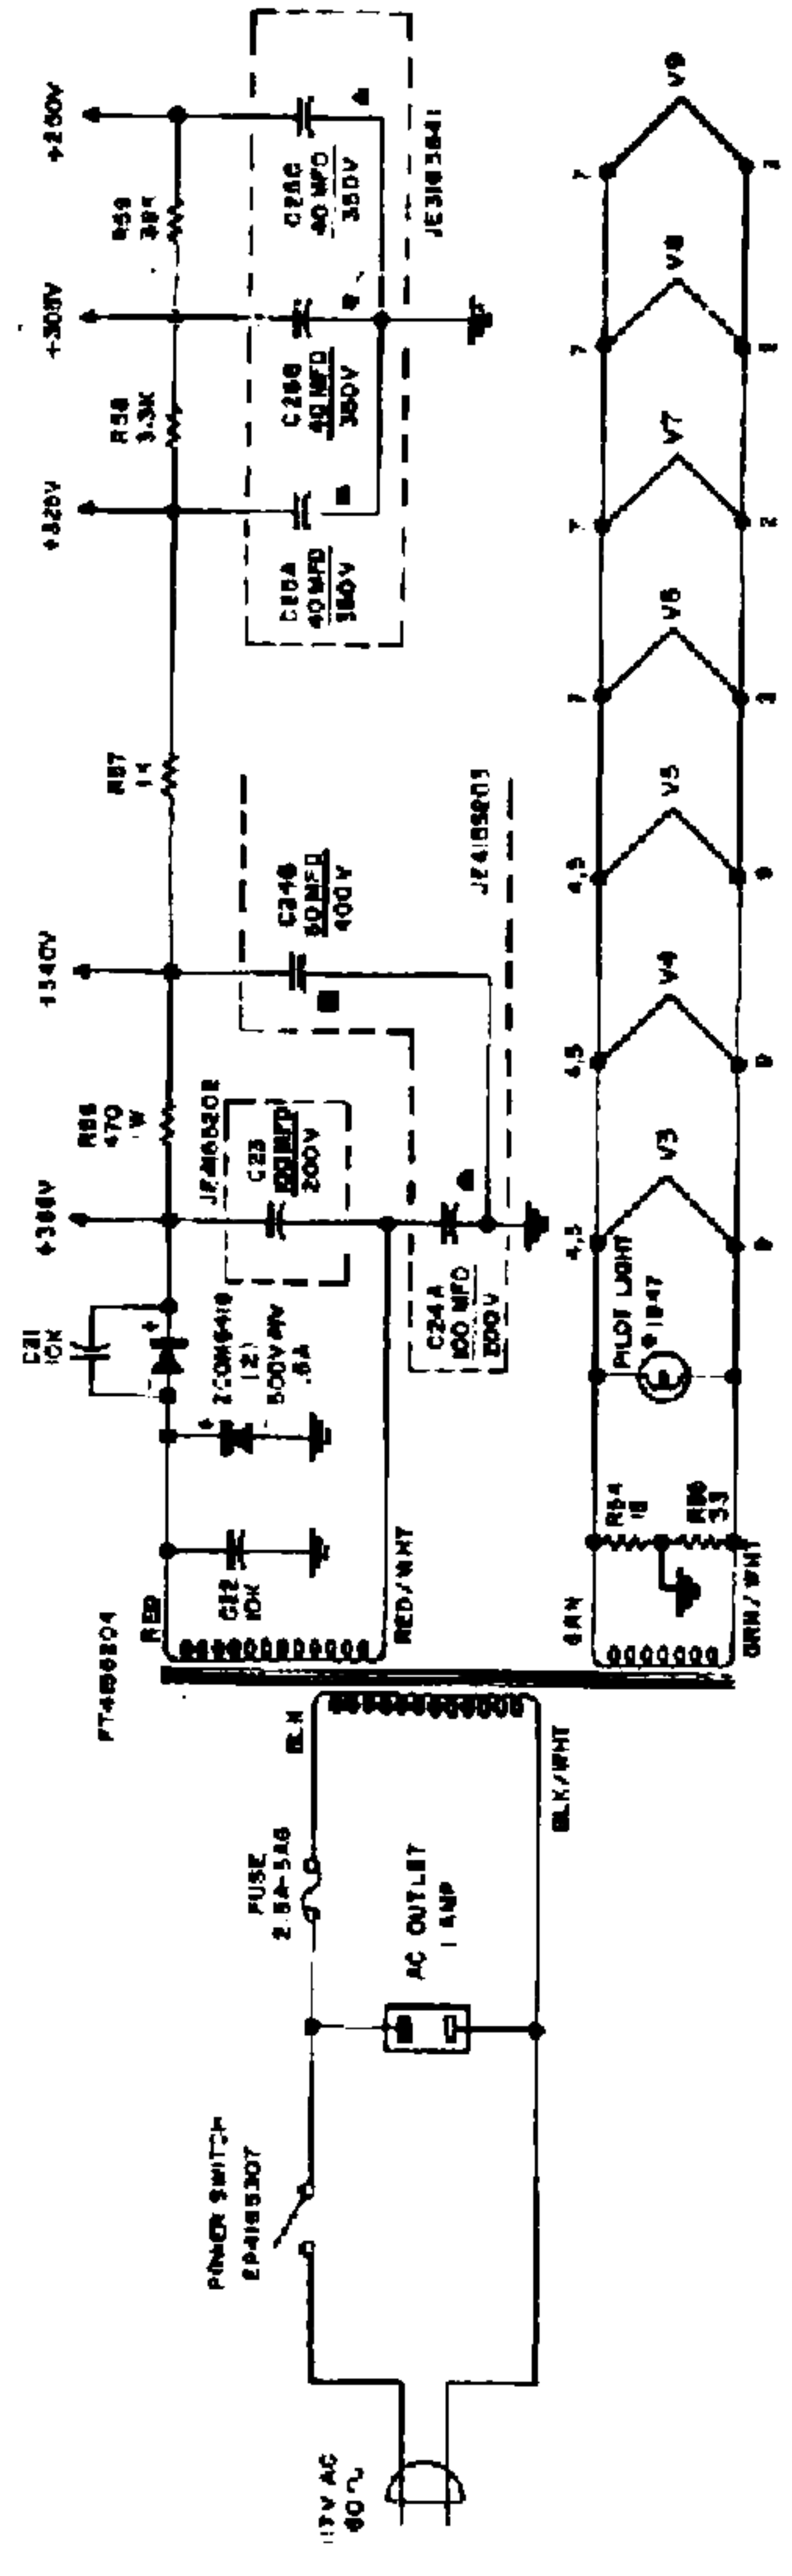

VOLTAGE & RESISTANCE READINGS
FUNCTION SWITCH IN TUNER POSITION.
BASS & TREBLE CONTROLS FLAT.
BALANCE CONTROL IN CENTER.
LOUDNESS CONTROL MAX ON POSITION.
BLEND & STEREO POSITION.

CAUTION
TURN OFF POWER
BEFORE REMOVING
TUBES