

UI30 CIRCUIT DIAGRAM


COIL RESISTANCES

The wave range switch is drawn in the "S" position. Rotate movable contacts in the direction of the arrows for "M", "L" and "G". The voltages were taken with the receiver switched to "M", under no signal conditions.

These are average figures. The resistance of windings not shown is less than 1 ohm.

COIL	L3	L4	L5	L6	L7	L8	L11
OHMS	1	3.5	20.5	21	6	6	2

COIL	L12	L14	L15	L16	L17	L18	T1 Pri.
OHMS	5.2	6	6	270	7.5	7.5	300

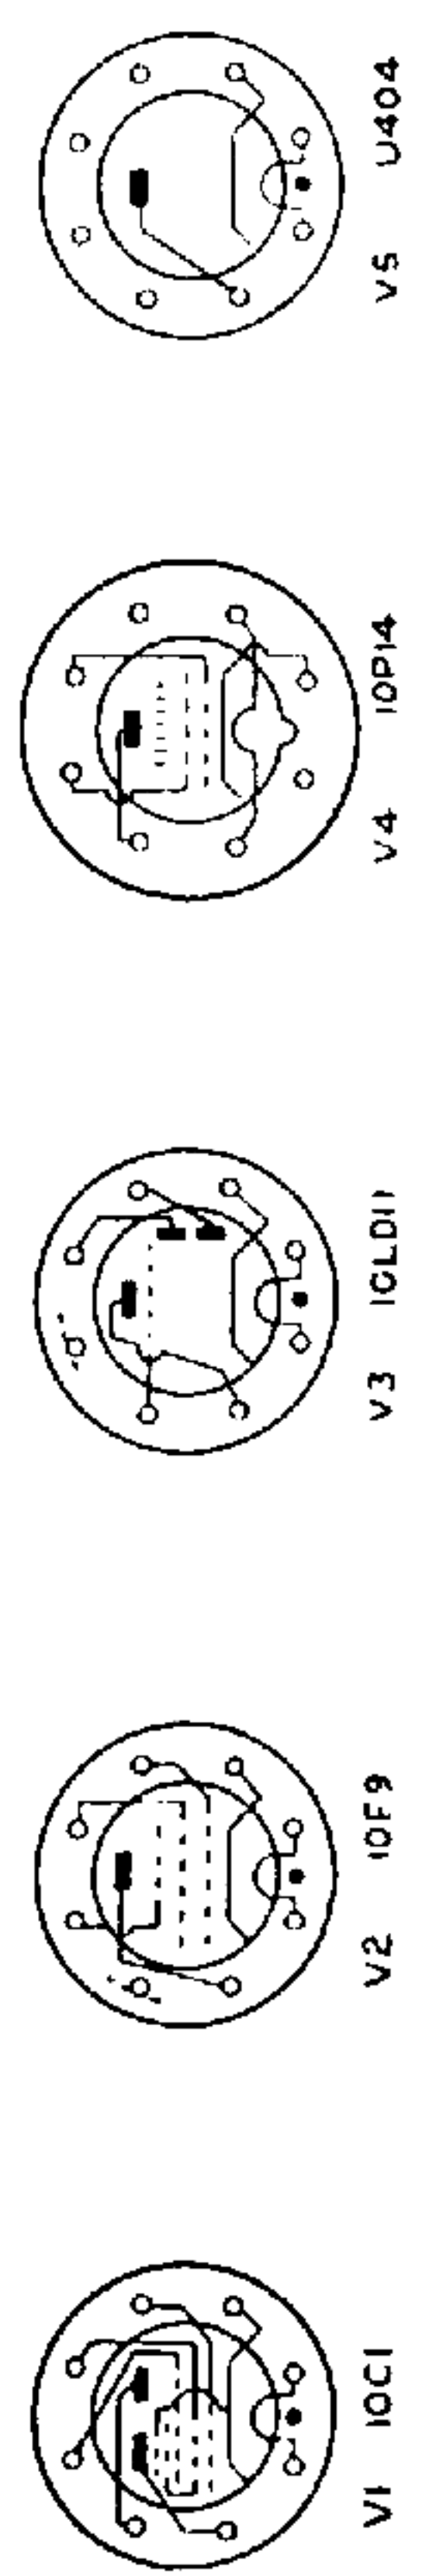

SUBJECT TO ALTERATION WITHOUT NOTICE. ISSUE F

