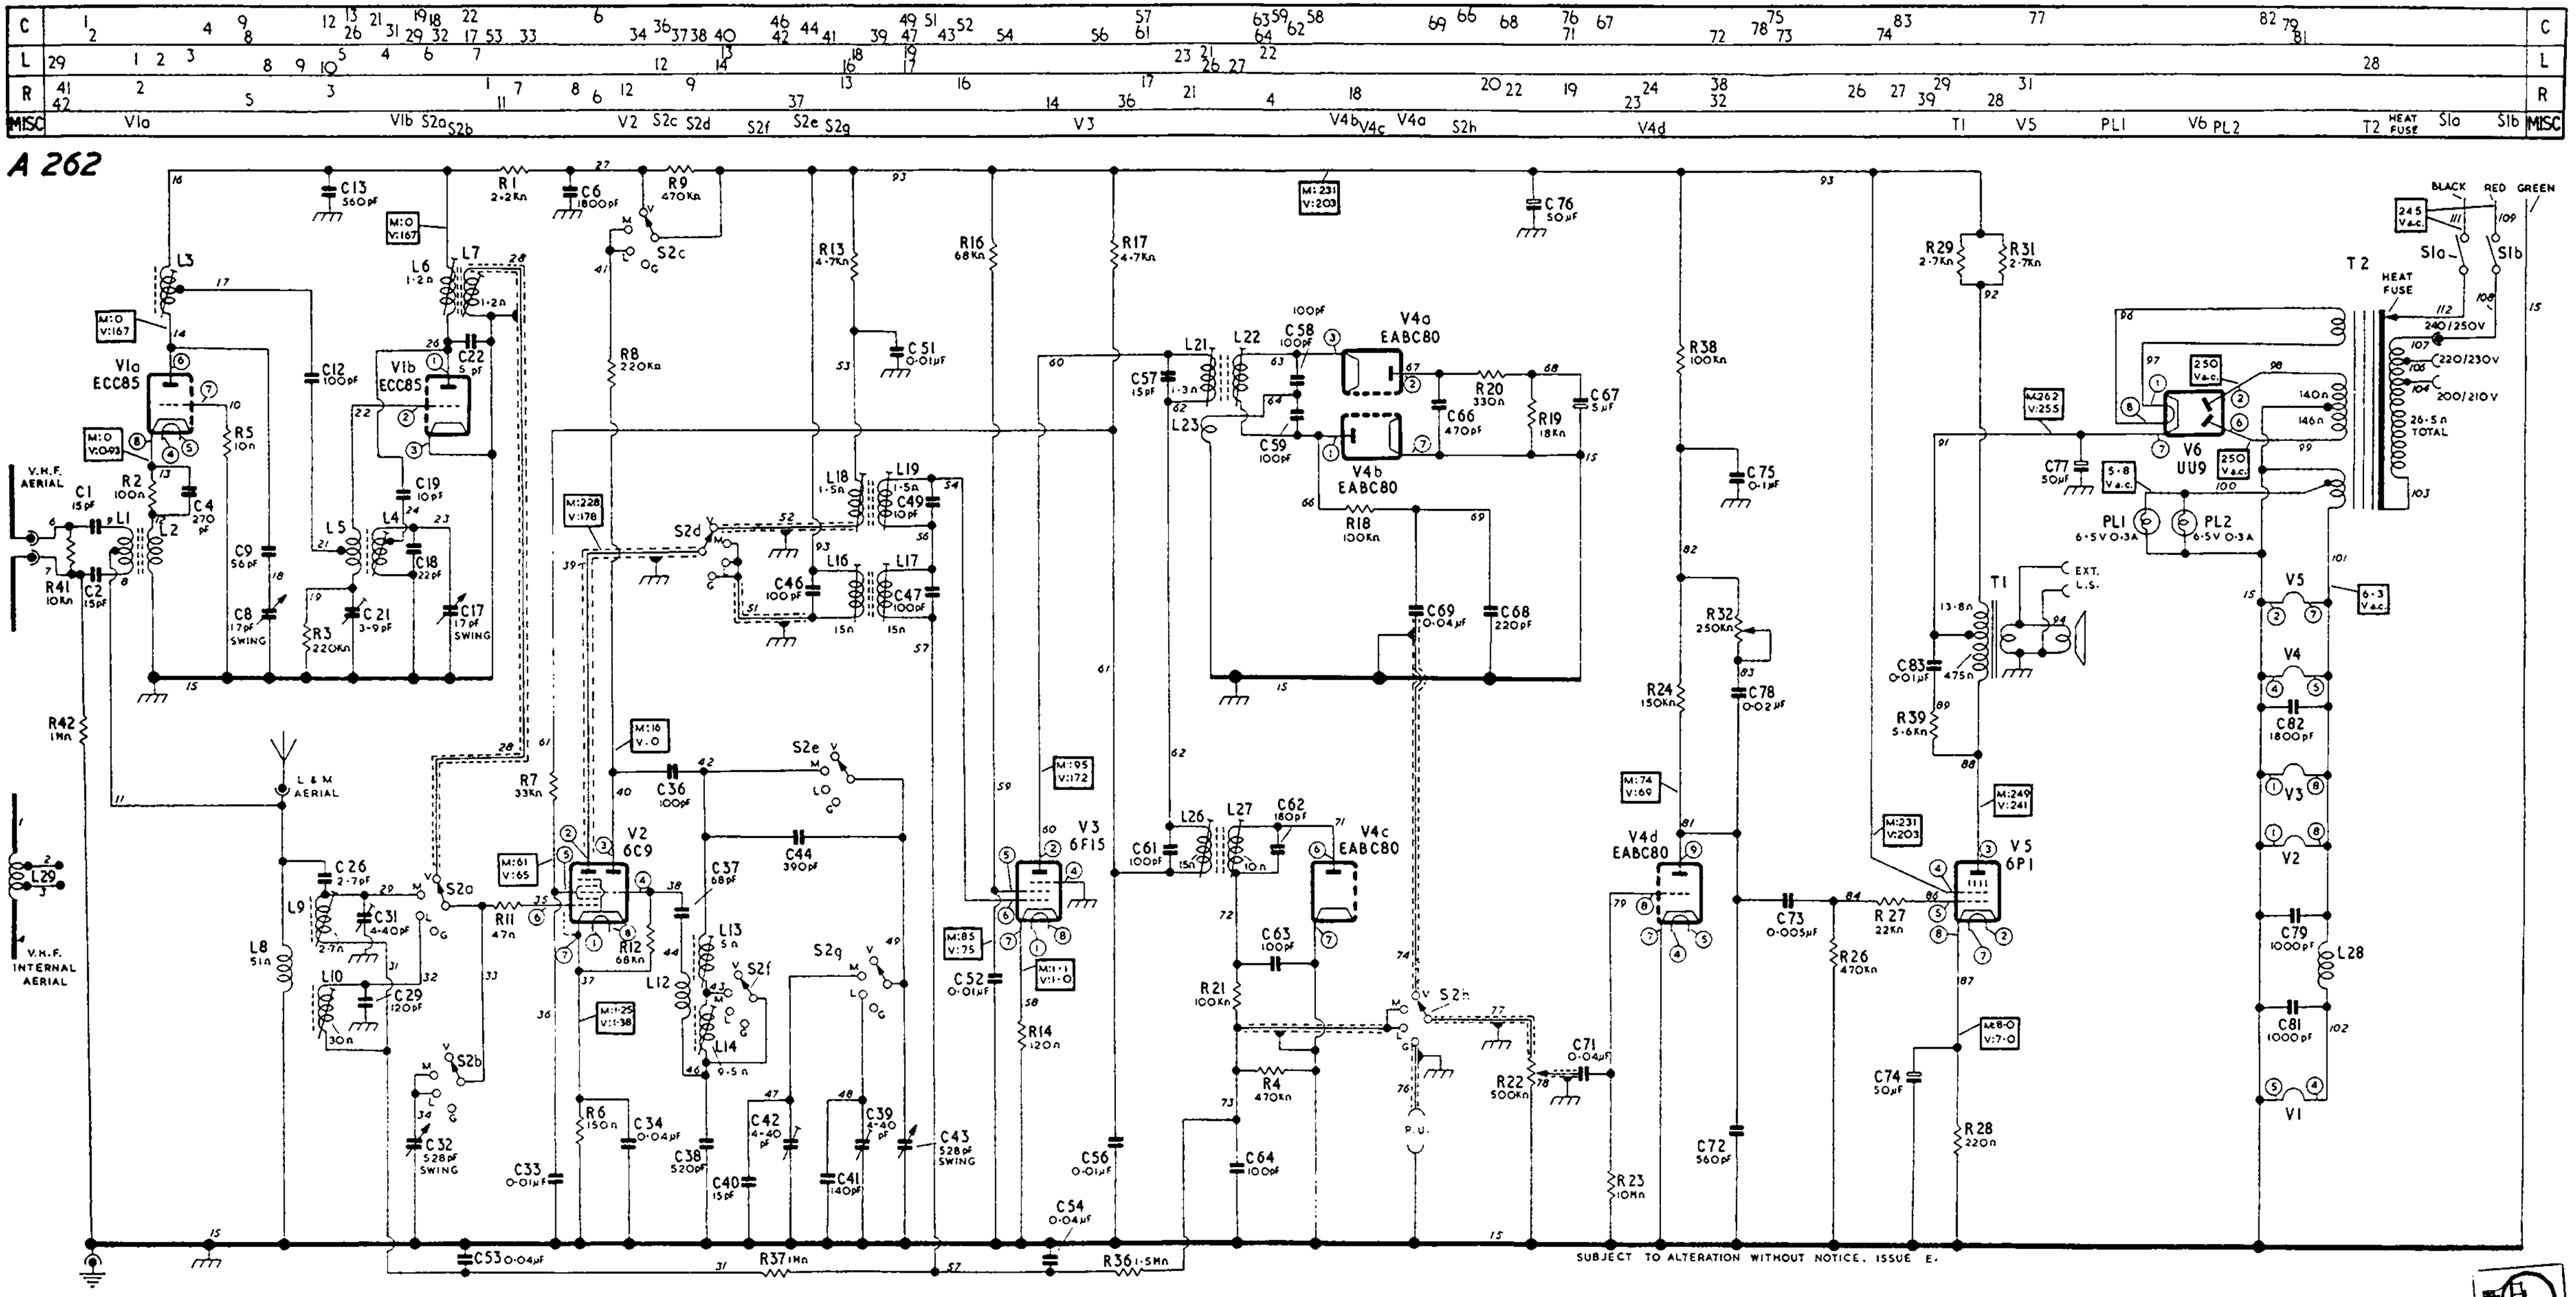

The wave-band switch (S2a–S2h) is shown in the L position.

Circuit voltages are shown within rectangles and were measured under no-signal conditions using a 20 KΩ/V meter, with the receiver switched first to the M band and then to Band II. Where readings differ appreciably, both are quoted with the M band reading at the top.

Where the resistance of a coil is less than one ohm, the value is omitted.

Component terminals and connecting leads are identified by test point (t.p.) numbers which correspond with those appearing on the chassis diagrams. The valve pin numbers are shown in small circles.

NOTE. In later sets, C62 is fitted inside the i.f.t. can.

ARCHIEF DOCUMENTATIEDIENST NVHR
Ned. Ver. v. Historie v/d Radio